


# TERRANO P 566MM 2950LM 830 II CL. WHITE 60D (28W)

DETAILED CARD

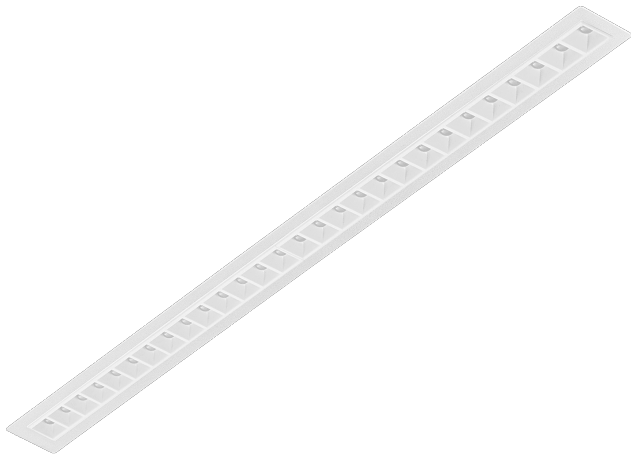

## TECHNICAL PARAMETERS

Index:	946318
Ingress protection:	IP20
Luminous flux [lm]*:	2950
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	powder coated steel
Diffuser material:	PC
Diffuser type:	matrix led
Mounting version:	recessed

## CHARACTERISTICS

The new linear luminaire in the form of a compact louver with LEDs and focusing lenses allows extremely effective glare reduction (UGR of 12-19). Terrano luminaires are characterised by excellent performance and a number of conveniences. These include, above all, express installation in plasterboard and modular ceilings. The Terrano P lamp - a plastic louver in a slim steel housing - is available in two colour temperatures of 3000 K and 4000 K and in two colour versions: white and black.

## APPLICATION

Terrano P is suitable for installation in plasterboard and modular ceilings and is ideal as general lighting, but it can also be used to spotlight selected elements of a space. Terrano P can be used both as an eye-catching feature in modern settings where lighting plays a key role and to complement subtle, minimalist spaces.

# TERRANO P 566MM 2950LM 830 II CL. WHITE 60D (28W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	946318	Optics material:	PC
EAN:	5905963946318	Optics:	lens
Light source:	LED module	Material of the body:	powder coated steel
Rated power of the luminaire [W]:	28	Colour of the body:	white
Supply voltage [V]:	220-240	Ingress protection:	IP20
Frequency [Hz]:	50-60	Mounting version:	recessed
Luminous flux [lm]:	2950	Dimensions (H/W/T/S) [mm]:	566/40/34
Luminous efficacy [lm/W]:	106	Mounting dimensions [mm]:	555/33
Energy efficiency class:	E	Dimensions of single box [mm]:	595/56/76
Electrical protection class:	II	Number on the palette [pcs]:	506
Colour temperature [K]:	3000	Net weight [kg]:	0.350
Colour rendering index:	>80	Category type:	louvres
SDCM:	≤ 3	AC voltage range [V]:	198-264
Power factor:	15	Light distribution type:	symmetric
Beam angle [°]:	60	Warranty [years]:	5
Diffuser material:	PC	CE certificate:	<a href="#">01/2024</a>
Diffuser type:	matrix led	Manual:	<a href="#">Download PDF</a>
Diffuser colour:	transparent		

## LIGHT CURVES



Card creation date:13 February 2024  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 01/2024



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)