


TERRANO P 566MM 1050LM 830 II CL. BLACK 60D (9W)

DETAILED CARD

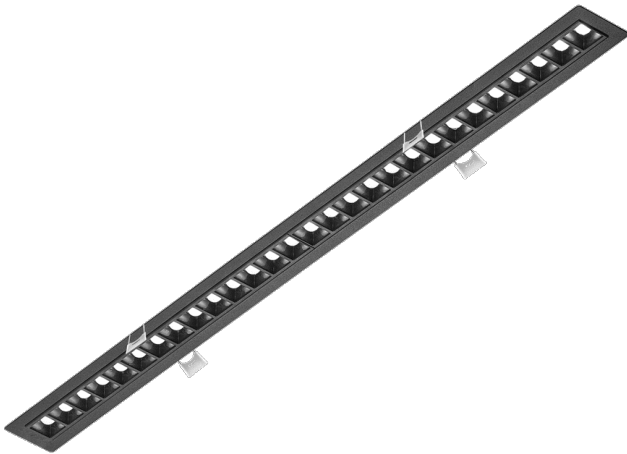

TECHNICAL PARAMETERS

| | |
|--------------------------|---------------------|
| Index: | 946462 |
| Ingress protection: | IP20 |
| Luminous flux [lm]*: | 1050 |
| Colour rendering index: | 80 |
| SDCM: | ≤ 3 |
| Energy efficiency class: | D |
| Material of the body: | powder coated steel |
| Diffuser material: | PC |
| Diffuser type: | matrix led |
| Mounting version: | recessed |

CHARACTERISTICS

The new linear luminaire in the form of a compact louver with LEDs and focusing lenses allows extremely effective glare reduction (UGR of 12-19). Terrano luminaires are characterised by excellent performance and a number of conveniences. These include, above all, express installation in plasterboard and modular ceilings. The Terrano P lamp - a plastic louver in a slim steel housing - is available in two colour temperatures of 3000 K and 4000 K and in two colour versions: white and black.

APPLICATION

Terrano P is suitable for installation in plasterboard and modular ceilings and is ideal as general lighting, but it can also be used to spotlight selected elements of a space. Terrano P can be used both as an eye-catching feature in modern settings where lighting plays a key role and to complement subtle, minimalist spaces.

TERRANO P 566MM 1050LM 830 II CL. BLACK 60D (9W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|---------------|--------------------------------|------------------------------|
| Index: | 946462 | Material of the body: | powder coated steel |
| EAN: | 5905963946462 | Colour of the body: | black |
| Light source: | LED module | Ingress protection: | IP20 |
| Rated power of the luminaire [W]: | 9 | Mounting version: | recessed |
| Supply voltage [V]: | 220-240 | Dimensions (H/W/T/S) [mm]: | 566/40/34 |
| Frequency [Hz]: | 50-60 | Mounting dimensions [mm]: | 555/33 |
| Luminous flux [lm]: | 1050 | Dimensions of single box [mm]: | 595/56/76 |
| Luminous efficacy [lm/W]: | 117 | Number on the palette [pcs]: | 506 |
| Energy efficiency class: | D | Net weight [kg]: | 0.350 |
| Electrical protection class: | II | Category type: | louvres |
| Colour temperature [K]: | 3000 | AC voltage range [V]: | 198-264 |
| Colour rendering index: | 80 | Light distribution type: | symmetric |
| SDCM: | ≤ 3 | LED lifespan L70B50 [h]: | 150000 |
| Power factor: | 0.55 | LED lifespan L80B20 [h]: | 100000 |
| Beam angle [°]: | 60 | LED lifespan L90B10 [h]: | 50000 |
| Diffuser material: | PC | Warranty [years]: | 5 |
| Diffuser type: | matrix led | CE certificate: | 65/2025 |
| Diffuser colour: | transparent | Manual: | Download PDF |
| Optics material: | PC | Plik LDT: | Download |
| Optics: | lens | | |

LIGHT CURVES



Card creation date:13 February 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 65/2025



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl