


TERRANO P 566MM 1750LM 830 II CL. BLACK 60D (13W)

DETAILED CARD

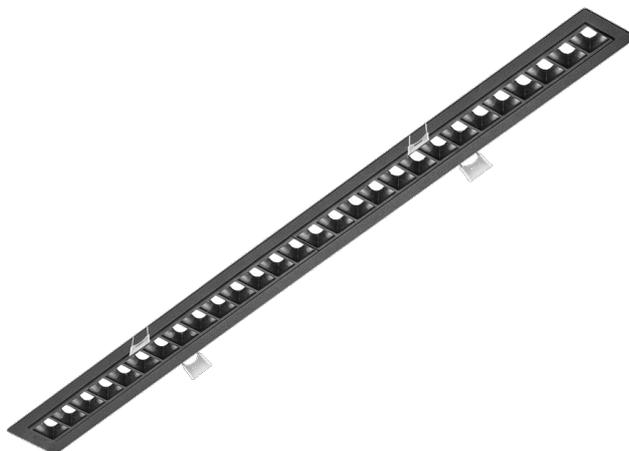

TECHNICAL PARAMETERS

Index:	946479
Ingress protection:	IP20
Luminous flux [lm]*:	1750
Color rendering index (Ra) >:	80
SDCM:	3
Energy efficiency class:	E
Material of the body:	powder coated steel
Diffuser material:	PC
Diffuser type:	matrix led
Mounting version:	recessed

CHARACTERISTICS

The new linear luminaire in the form of a compact louver with LEDs and focusing lenses allows extremely effective glare reduction (UGR of 12-19). Terrano luminaires are characterised by excellent performance and a number of conveniences. These include, above all, express installation in plasterboard and modular ceilings. The Terrano P lamp - a plastic louver in a slim steel housing - is available in two colour temperatures of 3000 K and 4000 K and in two colour versions: white and black.

APPLICATION

Terrano P is suitable for installation in plasterboard and modular ceilings and is ideal as general lighting, but it can also be used to spotlight selected elements of a space. Terrano P can be used both as an eye-catching feature in modern settings where lighting plays a key role and to complement subtle, minimalist spaces.

