


# CONTRA PLUS LED 1195X295MM MULTI 3200-4900LM 840/830 IP40/IP20 II CL. MAT PMMA 26-39W DALI

DETAILED CARD

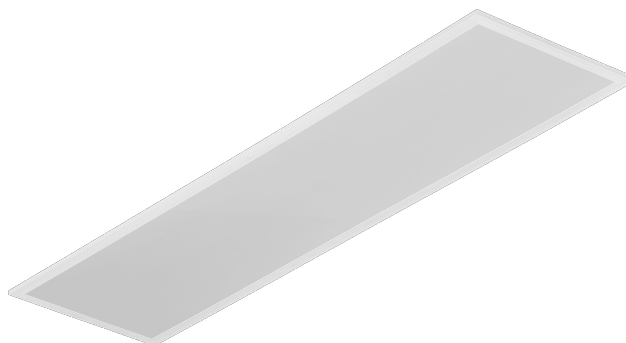

## TECHNICAL PARAMETERS

<b>Index:</b>	374814
<b>Rated power [W] - range:</b>	26-39
<b>Luminous flux of the luminaire [lm] - range:</b>	3200-4900
<b>Colour temperature [K] - range:</b>	4000/3000
<b>Ingress protection:</b>	IP40/IP20
<b>Impact resistance:</b>	IK03
<b>Color rendering index (Ra) &gt;:</b>	80
<b>Energy efficiency class:</b>	D
<b>Material of the body:</b>	coated aluminium
<b>Diffuser material:</b>	PMMA

## CHARACTERISTICS

Contra Plus LED versatile LED panel characterised by its low, slim profile and elegant design. Adapted for flush-mounted installation in modular ceilings, surface-mounted or suspended using an additional frame (available as an accessory). Luminaire with integrated energy-saving LED module, made of white painted aluminium profile, equipped with structured multi-layer PMMA MAT or PRM shade for perfect light diffusion. MULTI version. Choose from 2 light colours (3000K and 4000K) and 8 brightness levels in one LED panel thanks to the built-in switch.

## APPLICATION

The luminaire is intended for indoor use in office (offices, conference rooms) or representative use (hotels, restaurants); illumination of public facilities, including hospitals, educational facilities, offices, halls, garages, passageways, warehouses, shops, as well as in the food industry and food-related retail and service facilities. The unique design and excellent light performance enable CONTRA PLUS LED to be used as the main source of light, also for work that requires visual focus. The lamp is suitable for both new applications and the replacement of traditional T8 and T5 luminaires with energy-efficient LED solutions.

# CONTRA PLUS LED 1195X295MM MULTI 3200-4900LM 840/830 IP40/IP20 II CL. MAT PMMA 26-39W DALI

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	374814	<b>DIMM DALI:</b>	yes
<b>EAN:</b>	5905963374814	<b>Dimensions (H/W/T/S) [mm]:</b>	1195/295/39
<b>Light source:</b>	LED	<b>Impact resistance:</b>	IK03
<b>Rated power [W] - range:</b>	26-39	<b>Ingress protection:</b>	IP40/IP20
<b>Luminous flux of the luminaire [lm] - range:</b>	3200-4900	<b>Mounting version:</b>	podtynkowy, natynkowy z akcesorium, zwieszany z akcesorium
<b>Colour temperature [K] - range:</b>	4000/3000	<b>Working temperature [°C]:</b>	from 0 to +35
<b>Supply voltage [V]:</b>	220-240	<b>Dimensions of single box [mm]:</b>	1260
<b>Frequency [Hz]:</b>	50-60	<b>Number on the palette [pcs]:</b>	50
<b>Luminous efficacy [lm/W]:</b>	123	<b>Net weight [kg]:</b>	1.200
<b>Energy efficiency class:</b>	D	<b>Category type:</b>	troffers
<b>Electrical protection class:</b>	II	<b>LED lifespan L70B50 [h]:</b>	228000
<b>Color rendering index (Ra) &gt;:</b>	80	<b>LED lifespan L80B10 [h]:</b>	143000
<b>SDCM:</b>	2 (4000K), SDCM 1 (3000K)	<b>LED lifespan L90B10 [h]:</b>	68000
<b>Beam angle [°]:</b>	110	<b>Light distribution type:</b>	lambertian
<b>Surge protection [kV]:</b>	1	<b>Additional accessories:</b>	ramka natynkowa, system zwieszania
<b>Diffuser material:</b>	PMMA	<b>Warranty [years]:</b>	5
<b>Diffuser type:</b>	matt	<b>CE certificate:</b>	<a href="#">27/2025</a>
<b>Diffuser colour:</b>	milky	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>Optics material:</b>	PMMA	<b>Photobiological safety:</b>	RG0 - exempt (no photobiological hazard)
<b>Optics:</b>	lens	<b>ISO Certificates:</b>	9001:2015, 14001:2015, 45001:2018, 50001:2018
<b>Material of the body:</b>	coated aluminium	<b>Plik LDT:</b>	<a href="#">Download</a>
<b>Colour of the body:</b>	white		

# CONTRA PLUS LED 1195X295MM MULTI 3200-4900LM 840/830 IP40/IP20 II CL. MAT PMMA 26-39W DALI

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
374715	CONTRA LED surface-mounted frame CLICK 600x600x65mm
374708	CONTRA LED surface-mounted frame CLICK 1200x300x65mm
374692	CONTRA LED suspension system 1200x300
374685	CONTRA LED suspension system 600x600
374838	CONTRA LED MOUNTING CLIPS IN KG (4PCS)
374845	Frame adapter KG 635x635 WHITE
374852	Frame adapter KG 1235x335 WHITE
998966	Frame steel white structure RAL9016 600x600 SM "well effect"
374722	CONTRA LED suspension system 600x600 DALI
374739	CONTRA LED - suspension system 1200x300 DALI
761294	Emergency module 2W/10-50V Li-ION EMG-A-Li-2L 3h 3.6V 2.5Ah AT - CONTRA (GKO)



CONTRA LED surface-mounted frame  
CLICK 600x600x65mm (374715)



CONTRA LED surface-mounted frame  
CLICK 1200x300x65mm (374708)



CONTRA LED suspension system  
1200x300 (374692)



CONTRA LED suspension system  
600x600 (374685)



Frame adapter KG 635x635  
WHITE (374845)



Frame steel white structure RAL9016  
600x600 SM "well effect" (998966)

Card creation date: 13 February 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 27/2025