

PROXIMA SMD LED 24W BIAŁY AW 3H 3000K AUTOTEST

DETAILED CARD



TECHNICAL PARAMETERS

Index:	x
Ingress protection:	IP65/54
Impact resistance:	IK10
Luminous flux [lm]*:	1050 - 2300
Colour temperature [K]:	3000; 4000; 6000
Energy efficiency class:	F; G
Material of the body:	PP
Diffuser material:	PC
Diffuser type:	OPAL

CHARACTERISTICS

Surface mounted, round LED light fixture, high ingress protection class IP65 and an integrated energy-saving light source LED GO!. Base and ring made of UV-resistant plastic. Specially formed diffuser made of impact resistant PC ensures the highest impact resistance of the fitting (IK10). Optional equipment: radio motion sensor (RCR).

APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for outdoor (façade lighting) or indoor use (rooms with high humidity, passageways). Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms. The luminaire will also work well as a general light source due to the decorative effect that it provides (indirect light distribution on the mounting surface). Two ring colors available: white or silver.


PROXIMA SMD LED 24W BIAŁY AW 3H 3000K AUTOTEST

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	moduł LED	Motion sensor:	yes
Rated power of the luminaire [W]:	16	Emergency lighting [h]:	1; 2; 3
Supply voltage [V]:	220-240	DIMM DALI:	yes
Frequency [Hz]:	50-60	Master/slave:	master; slave
Luminous flux [lm]:	1050 - 2300	Net weight [kg]:	1.250; 1.320; 1.400; 1.700; 1.800
Energy efficiency class:	F; G	Warranty [years]:	2 / 0.5 (bateria); 5
Electrical protection class:	I; II	CE certificate:	387/2023; 47/2017; 62/2013; 94/2019
Colour temperature [K]:	3000; 4000; 6000	Index:	x
Colour rendering index:	>80	EAN:	x
Power factor:	0.53; 0.90	Category type:	bulkheads
Beam angle [°]:	120	Version:	Antywandal
Diffuser material:	PC	Vandalproof:	yes
Diffuser type:	OPAL	ETIM class:	EC002892
Material of the body:	PP	LED lifespan L70B50 [h]:	110000
Colour of the body:	biały; satynowy	LED lifespan L80B20 [h]:	72000
Dimensions (H/W/T/S) [mm]:	ø390/95	LED lifespan L90B10 [h]:	36000
Impact resistance:	IK10	Photobiological safety:	grupa ryzyka 1 (niskie ryzyko)
Ingress protection:	IP65/54	Ring colour:	satynowy
Mounting version:	natynkowy	Warranty [years]:	2; 2 / 0.5 (bateria)
Working temperature [°C]:	od -20 do +35; od 0 do +35	Manual:	Download PDF
Corridor function:	yes	PZH certificate:	HK/K/0389/01/2017

LIGHT CURVES

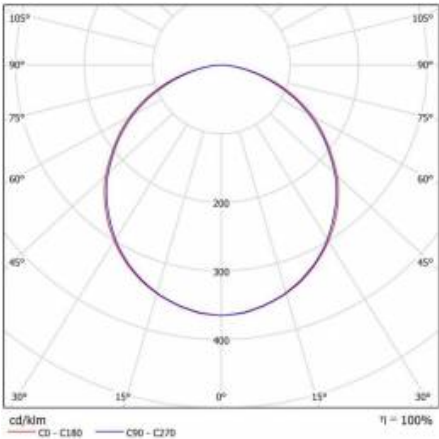

Card creation date: 22 January 2019

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 94/2019



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl