


# SQ 600 LED 4100LM PLX I CL. IP20 592X592MM 830 AW3H (45W) RAL9005

DETAILED CARD

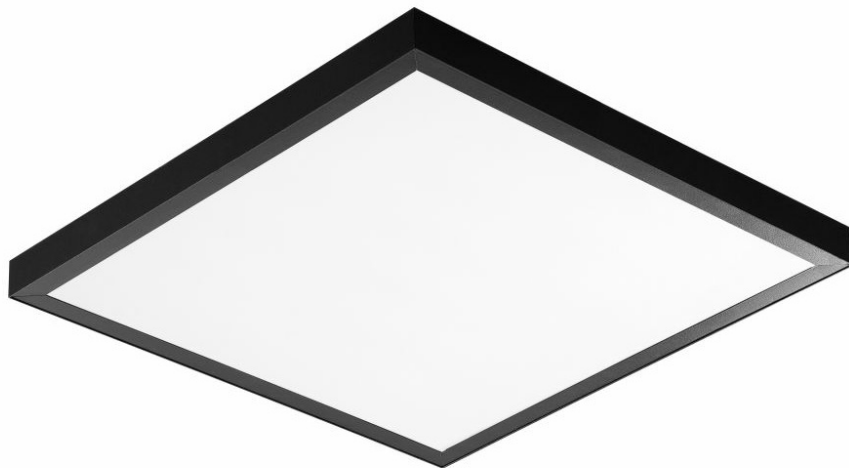

## TECHNICAL PARAMETERS

<b>Index:</b>	669415
<b>Ingress protection:</b>	IP44/IP20
<b>Nominal power [W]:</b>	45
<b>Luminous flux [lm]*:</b>	4100
<b>Colour rendering index:</b>	>80
<b>SDCM:</b>	≤ 5
<b>Energy efficiency class:</b>	F
<b>Material of the body:</b>	ABS
<b>Diffuser material:</b>	PS
<b>Diffuser type:</b>	OPAL

## CHARACTERISTICS

SQ 600 LED AW is a new line of square luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

The luminaire is available in 2 versions:

- with OPAL diffuser - providing soft light;
- with PRM diffuser - with higher luminous efficiency and low glare UGR <19 (18W, 24W, 32W versions).

Available options:

- RCR sensor - sensor used for motion detection, without twilight detection option; uses microwaves for detection (active sensor),
- control in the DALI standard,
- CORRIDOR corridor function (RCR + DALI).

The ingress protection- depends on the method of installation:

- surface mounted - IP20,
- flush-mounted - IP44/20.

## APPLICATION

Surface-mounted luminaire with the possibility of flush mounting in modular ceilings and in plasterboard ceilings (using plasterboard recessing kit) is especially recommended for offices, spacious corridors and public spaces.


# SQ 600 LED 4100LM PLX I CL. IP20 592X592MM 830 AW3H (45W) RAL9005

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	669415	Material of the body:	ABS
EAN:	5905963669415	Colour of the body:	black mat
Light source:	LED module	Dimensions (H/W/T/S) [mm]:	592/592/44
Nominal power [W]:	45	Mounting dimensions [mm]:	563/297
Supply voltage [V]:	220 - 240V	Ingress protection:	IP44/IP20
Frequency [Hz]:	50 - 60	Glow wire test [°C]:	650
Luminous flux [lm]:	4100	Mounting version:	surface mounted; recessed mounted in modular ceiling possible
Emergency luminous flux [lm]*:	200	Emergency lighting [h]:	3
Luminous efficacy [lm/W]:	80	Net weight [kg]:	2
Energy efficiency class:	F	Category type:	louvres
Electrical protection class:	I	Category of application:	commercial facilities, educational institutions
Colour temperature [K]:	3000	AC voltage range [V]:	90-175V
Colour rendering index:	>80	DC voltage range [V]:	198 - 264V
SDCM:	≤ 5	LED lifespan L70B50 [h]:	50000
Power factor:	0.97	LED lifespan L80B20 [h]:	32 000
Charging time [h:min]:	3	LED lifespan L90B10 [h]:	15000
Battery life [h:min]:	3	Light distribution type:	open space
Battery:	NiMH	Technical Warranty:	2 / 0.5 (battery)
Battery capacity [mAh]:	2100	CE certificate:	<a href="#">110/2023</a>
Diffuser material:	PS	ENEC Certificate:	<a href="#">PL BBJ/006/2021/M1</a>
Diffuser type:	OPAL	PZH certificate:	<a href="#">B-BK-60212-0618/20</a>
Diffuser colour:	white	CNBOP certificate:	<a href="#">5152/2023</a>
Optics material:	PMMA	Manual:	<a href="#">Download PDF</a>
Optics:	lens	Photobiological safety:	RG0 - exempt (no photobiological hazard)

## LIGHT CURVES

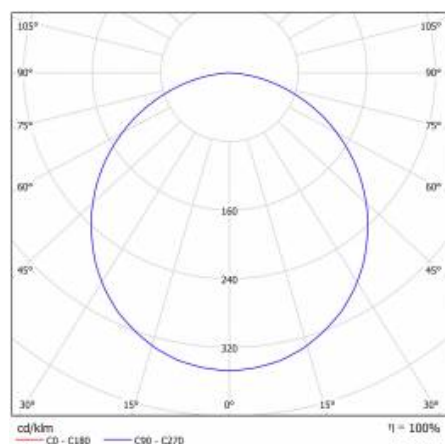

# SQ 600 LED 4100LM PLX I CL. IP20 592X592MM 830 AW3H (45W) RAL9005

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
999543	Plasterboard recessing kit 630x630 white (steel version)
978395	Installation kit SQ 600 Ceiling system H40 100x100



Plasterboard recessing kit 630x630 white (steel version) (999543)

Card creation date: 19 August 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 110/2023