

ASTRA LED S 1700LM 830 AR2 IP66 II CL. WIRE 0,7M PLUG/GN SP10KV 13W

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|------------------------------------|--------|
| Index: | 433733 |
| Ingress protection: | IP66 |
| Rated power of the luminaire [W]*: | 13 |
| Luminous flux [lm]*: | 1700 |
| Colour temperature [K]: | 3000 |
| Colour rendering index: | 80 |
| Electrical protection class: | II |
| Optics: | AR2 |
| Colour of the body: | grey |
| Luminous efficacy [lm/W]: | 131 |

CHARACTERISTICS

LED road luminaire with high luminous efficiency and energy-saving integrated LED module. Self-cleaning body made of polypropylene (PP) with fibreglass (FG), handle made of aluminium. The luminaire uses directional lens matrices (made of polycarbonate PC). The luminaire is characterised by a high IP66 ingress protection rating and mechanical impact resistance. The integrated bracket, which is adjustable in increments of 5 degrees, allows adjustment from: -5° to +15° (top, on pole); -5° to +15° (side, on boom). Supplied with 0.7m of H07RN-F cable as standard.

APPLICATION

Road luminaire suitable for illumination of: streets and municipal, local, internal and neighbourhood roads, cycle paths, alleys, pavements, car parks, squares, private properties and all open spaces.

ASTRA LED S 1700LM 830 AR2 IP66 II CL. WIRE 0,7M


PLUG/GN SP10KV 13W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|-----------------|-----------------------------|------------------------------|
| Index: | 433733 | Diffuser type: | transparent |
| EAN: | 5905963433733 | Optics material: | PC |
| Category type: | street lighting | Optics: | AR2 |
| Light source: | LED module | Material of the body: | PP+15% GF |
| Rated power of the luminaire [W]: | 13 | Colour of the body: | grey |
| Supply voltage [V]: | 230 | Dimensions (H/W/T/S) [mm]: | 75/175/500 |
| Frequency [Hz]: | 50 | Mounting dimensions [mm]: | fi 64/ fi 78 |
| Luminous flux [lm]: | 1700 | Ingress protection: | IP66 |
| Luminous efficacy [lm/W]: | 131 | Mounting version: | Top, on pole / Side, on boom |
| Energy efficiency class: | D | Lateral surface (SCx) [m2]: | 0.016 |
| Electrical protection class: | II | Net weight [kg]: | 1.180 |
| Colour temperature [K]: | 3000 | Wire type: | H07RN-F 2x1.5 |
| Colour rendering index: | 80 | Warranty [years]: | 5 |
| SDCM: | ≤ 4 | CE certificate: | 16/2024 |
| Power factor: | 0.82 | Manual: | Download PDF |
| Surge protection [kV]: | 10 | ENEC Certificate: | |
| Diffuser material: | PC | | |

LIGHT CURVES

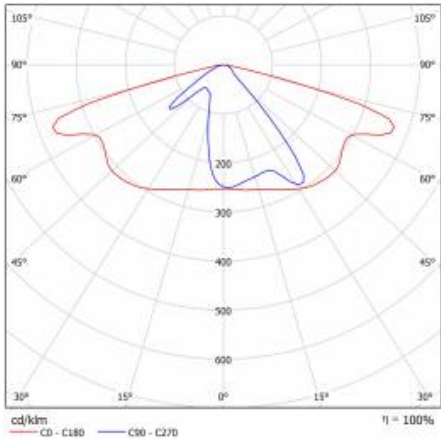

Card creation date:14 May 2024
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric andelectronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 16/2024



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl