

# ASTRA LED 8400LM 830 AR4 IP65 II CL. RCR WIRE 0,7M PLUG/GN SP10KV 69W

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	433344
<b>Ingress protection:</b>	IP66
<b>Impact resistance:</b>	IK08
<b>Rated power of the luminaire [W]*:</b>	69
<b>Luminous flux [lm]*:</b>	8400
<b>Colour temperature [K]:</b>	3000
<b>SDCM:</b>	≤ 3
<b>Colour rendering index:</b>	>80
<b>Electrical protection class:</b>	II
<b>Energy efficiency class:</b>	D

## CHARACTERISTICS

Streetlight LED fitting with high luminous flux (max 153 lm/W) and an integrated energy-saving LED module. The self-cleaning body made of polypropylene (PP) with fibreglass (GF) and the grip made of aluminium. Thanks to the directional lens (made of PC), the light distribution meets the requirements of PN-EN 13201 lighting class. IP66 ingress protection class and IK08 impact-rating features make this fitting extremely tight and shock-resistant (vandal-resistant). Integrated, step-regulated grip allows to set the fitting by 5 degrees in the range of: -5° to +15° (peak to pole); -15° to +5° (side to boom). Options: any RAL color. RCR sensor controlled by remote control.

## APPLICATION

Luminaire applicable to: streets, local roads, bicycle paths, alleys, pavements, car parks and squares. Installation and mounting: lateral side entry, post-top mounting. Mounting grip integrated with the fitting.


# ASTRA LED 8400LM 830 AR4 IP65 II CL. RCR WIRE 0,7M PLUG/GN SP10KV 69W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	433344	Colour of the body:	gray
EAN:	5905963433344	Dimensions (H/W/T/S) [mm]:	640/233/113
Rated power of the luminaire [W]:	69	Mounting dimensions [mm]:	63
Light source:	LED module	Impact resistance:	IK08
Colour temperature [K]:	3000	Ingress protection:	IP66
Luminous flux [lm]:	8400	Mounting version:	na słupie: szczytowy lub z wysięgnikiem
Supply voltage [V]:	220-240	Working temperature [°C]:	from -20 to +35
Frequency [Hz]:	50-60	Tilt angle adjustment [°]:	-5 do +15
Motion sensor:	yes	Lateral surface (SCx) [m2]:	0.170
Optics:	AR4	Wire type:	H07RN-F
Luminous efficacy [lm/W]:	122	Cable length [m]:	0.70
Energy efficiency class:	D	Number on the palette [pcs]:	62
Electrical protection class:	II	Net weight [kg]:	1.900
Colour rendering index:	>80	Category type:	street lighting
SDCM:	≤ 3	LED lifespan L80B20 [h]:	75000
Power factor:	0.98	Light distribution type:	symetryczny/uliczny
Diffuser material:	PC	Surge protection [kV]:	10
Diffuser type:	matrix led	CE certificate:	<a href="#">102/2023</a>
Diffuser colour:	transparent	ENEC Certificate:	<a href="#">0324/ENEC/23</a>
Material of the body:	PP+FG	Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

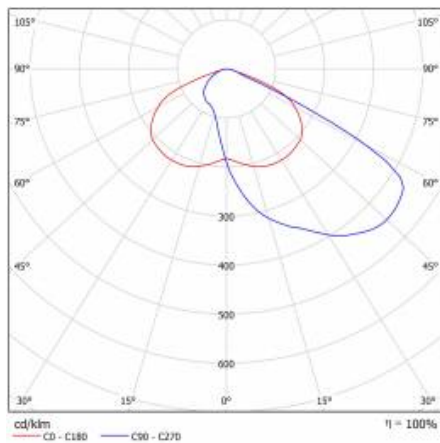

# ASTRA LED 8400LM 830 AR4 IP65 II CL. RCR WIRE 0,7M PLUG/GN SP10KV 69W

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
314049	wall holder (galvanized)
314056	wall holder (grey)
UL00229	mounting grip 78 mm



wall holder (galvanized) (314049)



wall holder (grey) (314056)



mounting grip 78 mm (UL00229)

Card creation date: 02 February 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 102/2023