

ASTRA LED 8850LM 840 AR4 IP65 II CL. RCR WIRE 0,7M PLUG/GN SP10KV 69W

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|---|--------|
| Index: | 433368 |
| Ingress protection: | IP66 |
| Impact resistance: | IK08 |
| Rated power of the luminaire [W]*: | 69 |
| Luminous flux [lm]*: | 8850 |
| Colour temperature [K]: | 4000 |
| SDCM: | ≤ 3 |
| Colour rendering index: | >80 |
| Electrical protection class: | II |
| Energy efficiency class: | D |

CHARACTERISTICS

Streetlight LED fitting with high luminous flux (max 153 lm/W) and an integrated energy-saving LED module. The self-cleaning body made of polypropylene (PP) with fibreglass (GF) and the grip made of aluminium. Thanks to the directional lens (made of PC), the light distribution meets the requirements of PN-EN 13201 lighting class. IP66 ingress protection class and IK08 impact-rating features make this fitting extremely tight and shock-resistant (vandal-resistant). Integrated, step-regulated grip allows to set the fitting by 5 degrees in the range of: -5° to +15° (peak to pole); -15° to +5° (side to boom). Options: any RAL color. RCR sensor controlled by remote control.

APPLICATION

Luminaire applicable to: streets, local roads, bicycle paths, alleys, pavements, car parks and squares. Installation and mounting: lateral side entry, post-top mounting. Mounting grip integrated with the fitting.


ASTRA LED 8850LM 840 AR4 IP65 II CL. RCR WIRE 0,7M PLUG/GN SP10KV 69W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|---------------|------------------------------|---|
| Index: | 433368 | Colour of the body: | gray |
| EAN: | 5905963433368 | Dimensions (H/W/T/S) [mm]: | 640/233/113 |
| Rated power of the luminaire [W]: | 69 | Mounting dimensions [mm]: | 63 |
| Light source: | LED module | Impact resistance: | IK08 |
| Colour temperature [K]: | 4000 | Ingress protection: | IP66 |
| Luminous flux [lm]: | 8850 | Mounting version: | na słupie: szczytowy lub z wysięgnikiem |
| Supply voltage [V]: | 220-240 | Working temperature [°C]: | from -20 to +35 |
| Frequency [Hz]: | 50-60 | Tilt angle adjustment [°]: | -5 do +15 |
| Motion sensor: | yes | Lateral surface (SCx) [m2]: | 0.170 |
| Optics: | AR4 | Wire type: | H07RN-F |
| Luminous efficacy [lm/W]: | 128 | Cable length [m]: | 0.70 |
| Energy efficiency class: | D | Number on the palette [pcs]: | 62 |
| Electrical protection class: | II | Net weight [kg]: | 1.900 |
| Colour rendering index: | >80 | Category type: | street lighting |
| SDCM: | ≤ 3 | LED lifespan L80B20 [h]: | 75000 |
| Power factor: | 0.98 | Light distribution type: | symetryczny/uliczny |
| Diffuser material: | PC | Surge protection [kV]: | 10 |
| Diffuser type: | matrix led | CE certificate: | 102/2023 |
| Diffuser colour: | transparent | ENEC Certificate: | 0324/ENEC/23 |
| Material of the body: | PP+FG | Manual: | Download PDF |

LIGHT CURVES

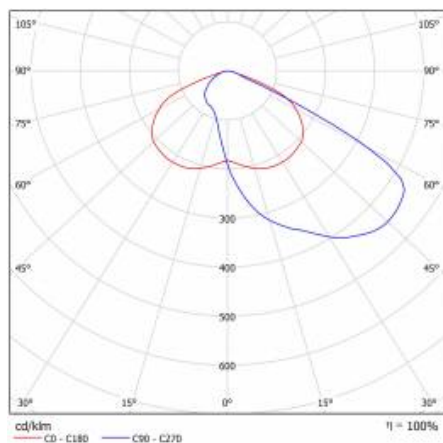

ASTRA LED 8850LM 840 AR4 IP65 II CL. RCR WIRE 0,7M PLUG/GN SP10KV 69W

DETAILED CARD

ACCESSORIES AVAILABLE

| index | Name |
|---------|--------------------------|
| 314049 | wall holder (galvanized) |
| 314056 | wall holder (grey) |
| UL00229 | mounting grip 78 mm |



wall holder (galvanized) (314049)



wall holder (grey) (314056)



mounting grip 78 mm (UL00229)

Card creation date: 02 February 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 102/2023