

# ASTRA S LED PRO 5300LM 857 AR5 IP66 I CL. DALI WIRE 0,7M PLUG/GN 34W

DETAILED CARD



## TECHNICAL PARAMETERS

|   |        |
|---|--------|
| <b>Index:</b>                             | 436949 |
| <b>Ingress protection:</b>                | IP66   |
| <b>Rated power of the luminaire [W]*:</b> | 34     |
| <b>Luminous flux [lm]*:</b>               | 5300   |
| <b>Colour temperature [K]:</b>            | 5700   |
| <b>Color rendering index (Ra) &gt;:</b>   | 80     |
| <b>Electrical protection class:</b>       | I      |
| <b>Optics:</b>                            | AR5    |
| <b>Colour of the body:</b>                | grey   |
| <b>Luminous efficacy [lm/W]:</b>          | 156    |

## CHARACTERISTICS

LED road luminaire with high luminous efficiency and energy-saving integrated LED module. Self-cleaning body made of polypropylene (PP) with fibreglass (FG), handle made of aluminium. The luminaire uses directional lens matrices (made of polycarbonate PC). The luminaire is characterised by a high IP66 ingress protection rating and mechanical impact resistance. The integrated bracket, which is adjustable in increments of 5 degrees, allows adjustment from: -5° to +15° (top, on pole); -5° to +15° (side, on boom). Supplied with 0.7m of H07RN-F cable as standard.

## APPLICATION

Road luminaire suitable for illumination of: streets and municipal, local, internal and neighbourhood roads, cycle paths, alleys, pavements, car parks, squares, private properties and all open spaces.


# ASTRA S LED PRO 5300LM 857 AR5 IP66 I CL. DALI WIRE 0,7M PLUG/GN 34W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |                 |                            |                              |
|-----------------------------------|-----------------|----------------------------|------------------------------|
| Index:                            | 436949          | Material of the body:      | PP+FG                        |
| EAN:                              | 5905963436949   | Colour of the body:        | grey                         |
| Category type:                    | street lighting | Dimensions (H/W/T/S) [mm]: | 75/175/500                   |
| Light source:                     | LED module      | Mounting dimensions [mm]:  | ø60                          |
| Rated power of the luminaire [W]: | 34              | Ingress protection:        | IP66                         |
| Supply voltage [V]:               | 220 - 240       | Net weight [kg]:           | 1.400                        |
| Frequency [Hz]:                   | 50 - 60         | Cable length [m]:          | 0.70                         |
| Luminous flux [lm]:               | 5300            | Product line:              | PRO                          |
| Luminous efficacy [lm/W]:         | 156             | Impact resistance:         | IK08                         |
| Energy efficiency class:          | C               | Working temperature [°C]:  | from -25 to +45              |
| Electrical protection class:      | I               | DIMM DALI:                 | yes                          |
| Colour temperature [K]:           | 5700            | Warranty [years]:          | 5                            |
| Color rendering index (Ra) >:     | 80              | CE certificate:            | <a href="#">42/2024</a>      |
| Surge protection [kV]:            | 1               | ENEC Certificate:          | <a href="#">0373/ENEC/24</a> |
| Diffuser material:                | PC              | Manual:                    | <a href="#">Download PDF</a> |
| Diffuser type:                    | matrix led      | Category of application:   | Street lighting              |
| Optics:                           | AR5             | Pliik LDT:                 | <a href="#">Download</a>     |

## LIGHT CURVES

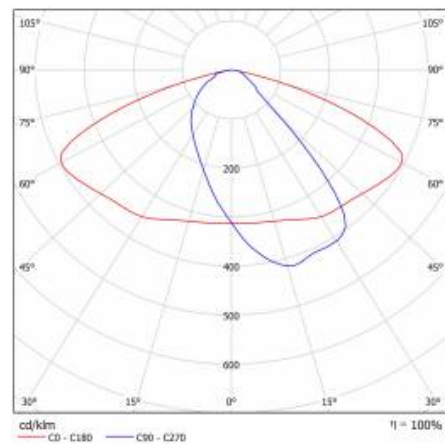

# ASTRA S LED PRO 5300LM 857 AR5 IP66 I CL. DALI WIRE 0,7M PLUG/GN 34W

DETAILED CARD

## ACCESSORIES AVAILABLE

| index   | Name   |
|---------|--|
| 598357  | Pole adapter 80/60 ALU   |
| UL00214 | Adjustable bracket Astra LED/Astra LED BASIC aluminium grey RAL 9006 diameter 64 mm Corona 2 LED |



Pole adapter 80/60 ALU (598357)



Adjustable bracket Astra LED/Astra LED BASIC aluminium grey RAL 9006 diameter 64 mm Corona 2 LED (UL00214)

Card creation date: 14 May 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 42/2024