

DOT CS 1W 3H NM AT WITH HEATER FOR NEGATIVE TEMPERATURES

DETAILED CARD



TECHNICAL PARAMETERS

Ingress protection:	IP65
Nominal power [W]:	1
Luminous flux [lm]*:	130
Colour temperature [K]:	5000
Electrical protection class:	II
Material of the body:	PC
Mounting version:	surface
CNBOP certificate:	4958/2023
Warranty [years]:	2 / 0.5 (bateria)
Energy efficiency class:	D

CHARACTERISTICS

Surface-mounted autonomous emergency luminaire with integrated, energy-saving LED light panel. Body made of polycarbonate (PC). Optical system available in 3 variants: basic, corridor, open space. Luminaire is fitted with batteries with 1h, 2h or 3h emergency operation time. The luminaire is using Ni-Mh or Ni-Cd battery with voltage of 3.6V and 24 hours of full charge with manual or automatic test function (AT).

APPLICATION

Autonomous emergency luminaire is mainly used for illumination of escape routes and fire protection devices after power failure, i.e. in emergency mode. Especially recommended everywhere, where it is necessary to install emergency lighting within the scope of modernization of existing system. Successfully replaces luminaires with embedded emergency module. Due to additional sealing, the luminaire achieves IP65 tightness and may be used in places with increased humidity or outdoors under the roofing.

DOT CS 1W 3H NM AT WITH HEATER FOR NEGATIVE TEMPERATURES

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	Impact resistance:	IK07
Nominal power [W]:	1	Mounting version:	surface
Rated power of the luminaire [W]:	1	Working temperature [°C]:	from -19 to +35
Supply voltage [V]:	220-240	Emergency lighting [h]:	3
Frequency [Hz]:	50-60	Index:	551154
Luminous flux [lm]:	130	EAN:	5905963551154
Luminous efficacy [lm/W]:	134	Category type:	emergency lighting
Electrical protection class:	II	Version:	general
Colour temperature [K]:	5000	Autotest:	yes
Color rendering index (Ra) >:	70	Operating mode:	NM
LED lifespan L70B50 [h]:	275000	Light distribution type:	general
Beam angle [°]:	120	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Battery:	NiMh	Luminaire rated power Omin [W]:	1
Diffuser material:	PMMA	Energy efficiency class:	D
Material of the body:	PC	Warranty [years]:	2 / 0.5 (bateria)
Colour of the body:	white	CE certificate:	112/2023
Dimensions (H/W/T/S) [mm]:	ø140/40	Manual:	Download PDF
Mounting dimensions [mm]:	104	Plik LDT:	Download
Ingress protection:	IP65		

DOT CS 1W 3H NM AT WITH HEATER FOR NEGATIVE TEMPERATURES

DETAILED CARD

ACCESSORIES AVAILABLE


index	Name
545672	DOT CS galvanized steel arm
551161	Ceiling spacer DOT white matt
997570	DOT square frame. white matt texture
997587	DOT square frame black matt texture




DOT CS galvanized steel arm (545672)



Ceiling spacer DOT white matt (551161)



DOT square frame. white matt texture (997570)

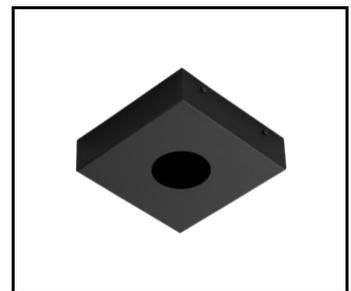

DOT square frame black matt texture (997587)

Card creation date: 27 October 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 112/2023