


# ELEGANTE SYSTEM LED CONNECTOR L 315X315MM 700LM OPAL DALI IP40 840 (8W)

DETAILED CARD

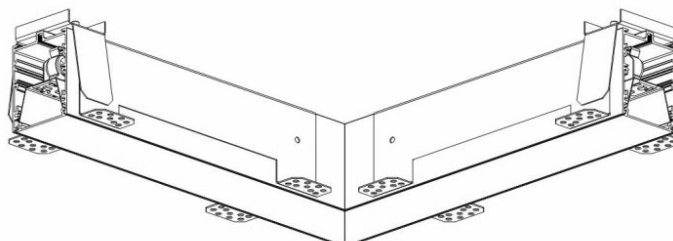

## TECHNICAL PARAMETERS

|                                 |           |
|---------------------------------|-----------|
| <b>Index:</b>                   | 388170    |
| <b>Ingress protection:</b>      | IP40/20   |
| <b>Impact resistance:</b>       | IK04      |
| <b>Nominal power [W]:</b>       | 8         |
| <b>Luminous flux [lm]*:</b>     | 700       |
| <b>Colour temperature [K]:</b>  | 4000      |
| <b>SDCM:</b>                    | ≤ 3       |
| <b>Energy efficiency class:</b> | G         |
| <b>Material of the body:</b>    | aluminium |
| <b>Colour of the body:</b>      | silver    |

## CHARACTERISTICS

ELEGANTE LED SYSTEM is a modern office fixture designed for flush mounting. It provides a combination of high light parameters and a modern decorative effect. The optical design has been designed using an iridescent diaphragm with high permeability and uniform light distribution. Available system switches allow for the design of concealed light lines in various configurations (T, X, L). The advantage of the system's roofs is the lampshade without connections to max. length 25m.

## APPLICATION

The luminaire is dedicated for internal use. For use in office and commercial facilities, in particular in representative rooms.

# ELEGANTE SYSTEM LED CONNECTOR L 315X315MM 700LM OPAL DALI IP40 840 (8W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |               |                           |   |
|-----------------------------------|---------------|---------------------------|---|
| Light source:                     | LED module    | Impact resistance:        | IK04  |
| Nominal power [W]:                | 8             | Ingress protection:       | IP40/20   |
| Rated power of the luminaire [W]: | 9.81          | Mounting version:         | recessed  |
| Supply voltage [V]:               | 220-240       | Working temperature [°C]: | from -20 to +35   |
| Frequency [Hz]:                   | 50 - 60       | DIMM DALI:                | yes   |
| Source luminous flux [lm]*:       | 1223          | Accessories included:     | diffuser  |
| Luminous flux [lm]:               | 700           | Through wiring:           | 5x2.5   |
| Luminous efficacy [lm/W]:         | 71            | Net weight [kg]:          | 1.600   |
| Energy efficiency class:          | G             | Gross weight [kg]:        | 1.900   |
| Electrical protection class:      | I             | Index:                    | 388170  |
| Colour temperature [K]:           | 4000          | EAN:                      | 5905963388170   |
| Colour rendering index:           | >80           | Category type:            | systems   |
| SDCM:                             | ≤ 3           | Version:                  | L connector   |
| Power factor:                     | 0.65          | Product line:             | SYSTEM 16W/8W   |
| Diffuser material:                | PC            | Light distribution type:  | open space  |
| Diffuser type:                    | OPAL          | Kolejność:                | D   |
| Diffuser colour:                  | white         | ETIM class:               | EC000282  |
| Material of the body:             | aluminium     | CE certificate:           | <a href="#">244/2023</a>  |
| Colour of the body:               | silver        | Photobiological safety:   | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Dimensions (H/W/T/S) [mm]:        | 315/315/65    | Warranty [years]:         | 5   |
| Mounting dimensions [mm]:         | 315/55/315/55 | Manual:                   | <a href="#">Download PDF</a>  |

# ELEGANTE SYSTEM LED CONNECTOR L 315X315MM 700LM OPAL DALI IP40 840 (8W)

DETAILED CARD

## ACCESSORIES AVAILABLE

| index    | Name  |
|----------|---|
| 81000945 | ELEGANTE LED SYSTEM - OPAL diffuser - 1 rm (max 25 rm)              |
| 388736   | ELEGANTE SYSTEM LED end set   |
| 388743   | ELEGANTE SYSTEM LED gniazdo 3 polowe                                |
| 388750   | ELEGANTE SYSTEM LED gniazdo 5 polowe                                |
| 388767   | ELEGANTE SYSTEM LED wtyk 3 polowy                                   |
| 388774   | ELEGANTE SYSTEM LED wtyk 5 polowy                                   |
| 388729   | ELEGANTE SYSTEM LED klosz PC opal co-extrusion+soft fixing part 25m |



ELEGANTE SYSTEM LED gniazdo 3 polowe (388743)



ELEGANTE SYSTEM LED gniazdo 5 polowe (388750)



ELEGANTE SYSTEM LED wtyk 3 polowy (388767)



ELEGANTE SYSTEM LED wtyk 5 polowy (388774)



ELEGANTE SYSTEM LED klosz PC opal co-extrusion+soft fixing part 25m (388729)

Card creation date: 03 August 2018

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 244/2023