

ILUMI BOLLARD 600 1100LM 830 IP65 I CL. 360° ANTRACITE 24W

DETAILED CARD



TECHNICAL PARAMETERS

Index:	377303
Rated power of the luminaire [W]*:	24
Ingress protection:	IP65
Impact resistance:	IK10
Luminous flux [lm]*:	1100
Colour temperature [K]:	3000
Material of the body:	aluminium
Colour of the body:	antracyt
Beam angle [°]:	360
Dimensions (H/W/T/S) [mm]:	600/fi170

CHARACTERISTICS

The Bollard series has been designed using modern simulation methods to achieve the highest product quality. A product based on LEDs from the renowned American company CREE® IP67. The luminaire is made of aluminium. Power supply 220-240V AC. 5-year warranty. Power: 24W.

APPLICATION

Bollard outdoor luminaires can be used to light and illuminate a wide range of locations and objects, including but not limited to:

- * parks,
- * gardens,
- * monuments,
- * squares,
- * fountains.


ILUMI BOLLARD 600 1100LM 830 IP65 I CL. 360° ANTRACITE 24W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	377303	Dimensions (H/W/T/S) [mm]:	600/fi170
Rated power of the luminaire [W]:	24	Colour rendering index:	80
EAN:	5905963377303	Beam angle [°]:	360
Colour temperature [K]:	3000	Material of the body:	aluminium
Light source:	LED module	Ring material:	aluminium
Luminous flux [lm]:	1100	Ring colour:	black
Control:	ON/OFF	Impact resistance:	IK10
Supply voltage [V]:	220 - 240	Ingress protection:	IP65
Colour of the body:	antracyt	LED lifespan L90B10 [h]:	65000
Frequency [Hz]:	50 - 60	Category type:	accent lighting
Cable length [m]:	0.50	CE certificate:	78/2024
Working temperature [°C]:	from -20 to +55	Warranty [years]:	5
Electrical protection class:	I	Manual:	Download PDF

LIGHT CURVES

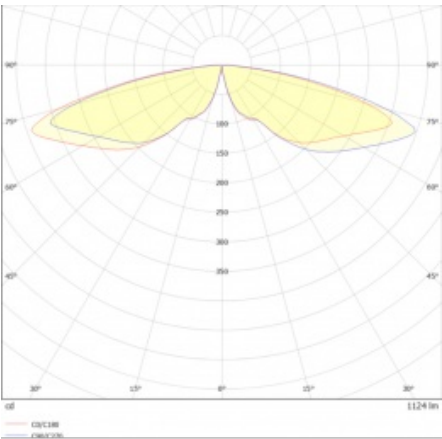

Card creation date: 17 October 2024
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 78/2024