

ILUMI BOLLARD 1000 1100LM 830 IP67 I CL. 360° ANTRACITE 24W

DETAILED CARD



TECHNICAL PARAMETERS

Index:	377310
Rated power of the luminaire [W]*:	24
Ingress protection:	IP67
Impact resistance:	IK10
Luminous flux [lm]*:	1100
Colour temperature [K]:	3000
Material of the body:	aluminium
Colour of the body:	antracyt
Beam angle [°]:	360
Dimensions (H/W/T/S) [mm]:	1000/f170

CHARACTERISTICS

The Bollard series has been designed using modern simulation methods to achieve the highest product quality. A product based on LEDs from the renowned American company CREE® IP67. The luminaire is made of aluminium. Power supply 220-240V AC. 5-year warranty. Power: 24W.

APPLICATION

Bollard outdoor luminaires can be used to light and illuminate a wide range of locations and objects, including but not limited to:

- * parks,
- * gardens,
- * monuments,
- * squares,
- * fountains.


ILUMI BOLLARD 1000 1100LM 830 IP67 I CL. 360° ANTRACITE 24W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	377310	Ring material:	aluminium
EAN:	5905963377310	Ring colour:	black
Light source:	LED module	Dimensions (H/W/T/S) [mm]:	1000/fi170
Rated power of the luminaire [W]:	24	Impact resistance:	IK10
Supply voltage [V]:	220 - 240	Ingress protection:	IP67
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +55
Luminous flux [lm]:	1100	Control:	ON/OFF
Electrical protection class:	I	Cable length [m]:	0.50
Colour temperature [K]:	3000	LED lifespan L90B10 [h]:	65000
Colour rendering index:	80	Category type:	accent lighting
Beam angle [°]:	360	CE certificate:	78/2024
Material of the body:	aluminium	Warranty [years]:	5
Colour of the body:	antracyt	Manual:	Download PDF

LIGHT CURVES

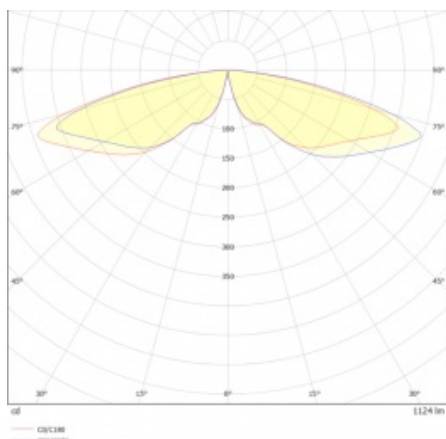

Card creation date: 24 September 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 78/2024



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl