

ILUMI SPOT M 3700LM 830 IP67 I CL. 30° BLACK ALU 30W

DETAILED CARD



TECHNICAL PARAMETERS

Index:	377112
Rated power of the luminaire [W]*:	30
Ingress protection:	IP67
Impact resistance:	IK10
Luminous flux [lm]*:	3700
Colour temperature [K]:	3000
Material of the body:	aluminium
Colour of the body:	black
Beam angle [°]:	30
Dimensions (H/W/T/S) [mm]:	fi194

CHARACTERISTICS

The Ilumi Spot series has been designed using modern simulation methods to achieve the highest product quality. A product based on LEDs from the renowned American company CREE® IP67. The luminaire is made of ADC12 aluminium alloy. Round front. 5-year warranty. Power: 30 W.

APPLICATION

ILUMI SPOT outdoor luminaires can be used to light and illuminate a wide range of places and objects, such as, but not limited to:

- * parks,
- * gardens,
- * monuments,
- * squares,
- * fountains.


ILUMI SPOT M 3700LM 830 IP67 I CL. 30° BLACK ALU 30W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Rated power of the luminaire [W]:	30	Ring material:	aluminium
Index:	377112	Ring colour:	black
Colour temperature [K]:	3000	Impact resistance:	IK10
EAN:	5905963377112	Ingress protection:	IP67
Luminous flux [lm]:	3700	Working temperature [°C]:	from -20 to +55
Light source:	COB LED	Control:	ON/OFF
Colour of the body:	black	Wire type:	H07RN-F 3G2
Beam angle [°]:	30	Cable length [m]:	0.50
Supply voltage [V]:	220 - 240	Category type:	accent lighting
Frequency [Hz]:	50 - 60	LED lifespan L90B10 [h]:	60000
Dimensions (H/W/T/S) [mm]:	f1194	Warranty [years]:	5
Electrical protection class:	I	CE certificate:	79/2024
Colour rendering index:	80	Manual:	Download PDF
Material of the body:	aluminium		

LIGHT CURVES

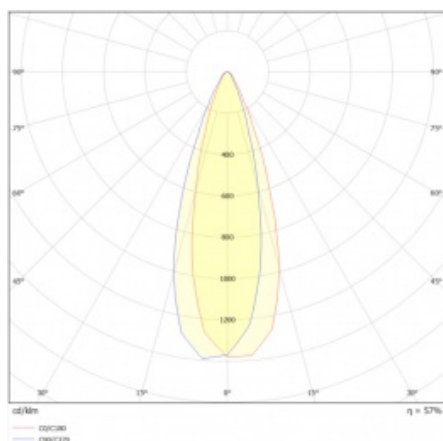

Card creation date: 11 September 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 79/2024