# ILUMI SPOT M 3750LM 840 IP67 I CL.10° BLACK ALU 30W

DETAILED CARD



## TECHNICAL PARAMETERS

| | |
|---|---|
| **Index:** | 377129 |
| **Rated power of the luminaire [W]*:** | 30 |
| **Ingress protection:** | IP67 |
| **Impact resistance:** | IK10 |
| **Luminous flux [lm]*:** | 3750 |
| **Colour temperature [K]:** | 4000 |
| **Material of the body:** | aluminium |
| **Colour of the body:** | black |
| **Beam angle [°]:** | 10 |
| **Dimensions (H/W/T/S) [mm]:** | fi194 |

## CHARACTERISTICS

The Ilumi Spot series has been designed using modern simulation methods to achieve the highest product quality. A product based on LEDs from the renowned American company CREE® IP67. The luminaire is made of ADC12 aluminium alloy. Round front. 5-year warranty. Power: 30 W.

## APPLICATION

ILUMI SPOT outdoor luminaires can be used to light and illuminate a wide range of places and objects, such as, but not limited to:

* parks,
* gardens,
* monuments,
* squares,
* fountains.


# ILUMI SPOT M 3750LM 840 IP67 I CL.10° BLACK ALU 30W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

| | | | |
|---|---|---|---|
| **Index:** | 377129 | **Ring colour:** | black |
| **EAN:** | 5905963377129 | **Dimensions (H/W/T/S) [mm]:** | fi194 |
| **Light source:** | COB LED | **Impact resistance:** | IK10 |
| **Rated power of the luminaire [W]:** | 30 | **Ingress protection:** | IP67 |
| **Supply voltage [V]:** | 220 - 240 | **Working temperature [°C]:** | from -20 to +55 |
| **Frequency [Hz]:** | 50 - 60 | **Control:** | ON/OFF |
| **Luminous flux [lm]:** | 3750 | **Wire type:** | H07RN-F 3G3 |
| **Electrical protection class:** | I | **Cable length [m]:** | 0.50 |
| **Colour temperature [K]:** | 4000 | **Category type:** | accent lighting |
| **Color rendering index (Ra) >:** | 80 | **LED lifespan L90B10 [h]:** | 60000 |
| **Beam angle [°]:** | 10 | **Warranty [years]:** | 5 |
| **Material of the body:** | aluminium | **CE certificate:** | 54/2025 |
| **Colour of the body:** | black | **Manual:** | Download PDF |
| **Ring material:** | aluminium | **Plik LDT:** | Download |

## LIGHT CURVES

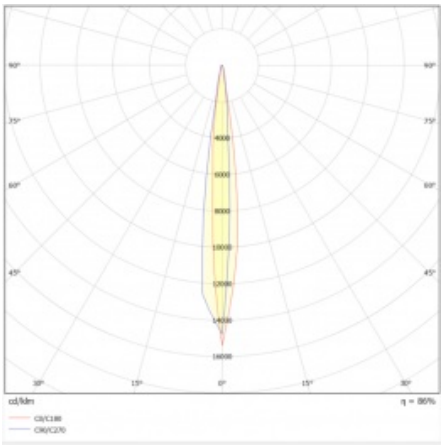

Card creation date: 15 April 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 54/2025

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl