

ILUMI SPOT M 4060LM 840 IP67 I CL.30° BLACK ALU 30W

DETAILED CARD



TECHNICAL PARAMETERS

Index:	377136
Rated power of the luminaire [W]*:	30
Ingress protection:	IP67
Impact resistance:	IK10
Luminous flux [lm]*:	4060
Colour temperature [K]:	4000
Material of the body:	aluminium
Colour of the body:	black
Beam angle [°]:	30
Dimensions (H/W/T/S) [mm]:	fi194

CHARACTERISTICS

The Ilumi Spot series has been designed using modern simulation methods to achieve the highest product quality. A product based on LEDs from the renowned American company CREE® IP67. The luminaire is made of ADC12 aluminium alloy. Round front. 5-year warranty. Power: 30 W.

APPLICATION

ILUMI SPOT outdoor luminaires can be used to light and illuminate a wide range of places and objects, such as, but not limited to:

- * parks,
- * gardens,
- * monuments,
- * squares,
- * fountains.


ILUMI SPOT M 4060LM 840 IP67 I CL.30° BLACK ALU 30W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	377136	Ring colour:	black
EAN:	5905963377136	Dimensions (H/W/T/S) [mm]:	f1194
Light source:	COB LED	Impact resistance:	IK10
Rated power of the luminaire [W]:	30	Ingress protection:	IP67
Supply voltage [V]:	220 - 240	Working temperature [°C]:	from -20 to +55
Frequency [Hz]:	50 - 60	Control:	ON/OFF
Luminous flux [lm]:	4060	Wire type:	H07RN-F 3G4
Electrical protection class:	I	Cable length [m]:	0.50
Colour temperature [K]:	4000	Category type:	accent lighting
Colour rendering index:	80	LED lifespan L90B10 [h]:	60000
Beam angle [°]:	30	Warranty [years]:	5
Material of the body:	aluminium	CE certificate:	79/2024
Colour of the body:	black	Manual:	Download PDF
Ring material:	aluminium		

LIGHT CURVES

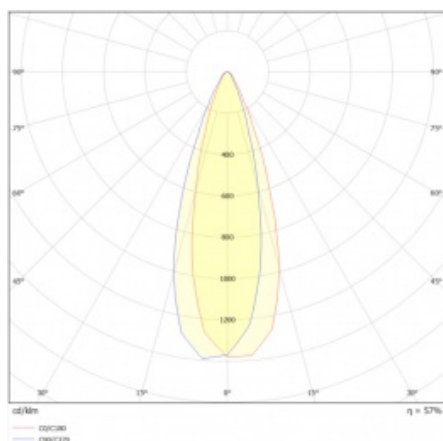

Card creation date: 11 September 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 79/2024