

# ILUMI SPOT M 4060LM 840 IP67 I CL.30° BLACK ALU 30W

DETAILED CARD



## TECHNICAL PARAMETERS

|   |           |
|---|-----------|
| <b>Index:</b>                             | 377136    |
| <b>Rated power of the luminaire [W]*:</b> | 30        |
| <b>Ingress protection:</b>                | IP67      |
| <b>Impact resistance:</b>                 | IK10      |
| <b>Luminous flux [lm]*:</b>               | 4060      |
| <b>Colour temperature [K]:</b>            | 4000      |
| <b>Material of the body:</b>              | aluminium |
| <b>Colour of the body:</b>                | black     |
| <b>Beam angle [°]:</b>                    | 30        |
| <b>Dimensions (H/W/T/S) [mm]:</b>         | fi194     |

## CHARACTERISTICS

The Ilumi Spot series has been designed using modern simulation methods to achieve the highest product quality. A product based on LEDs from the renowned American company CREE® IP67. The luminaire is made of ADC12 aluminium alloy. Round front. 5-year warranty. Power: 30 W.

## APPLICATION

ILUMI SPOT outdoor luminaires can be used to light and illuminate a wide range of places and objects, such as, but not limited to:

- \* parks,
- \* gardens,
- \* monuments,
- \* squares,
- \* fountains.


# ILUMI SPOT M 4060LM 840 IP67 I CL.30° BLACK ALU 30W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |               |                           |                              |
|-----------------------------------|---------------|---------------------------|------------------------------|
| Rated power of the luminaire [W]: | 30            | Ring material:            | aluminium                    |
| Index:                            | 377136        | Ring colour:              | black                        |
| Colour temperature [K]:           | 4000          | Impact resistance:        | IK10                         |
| EAN:                              | 5905963377136 | Ingress protection:       | IP67                         |
| Luminous flux [lm]:               | 4060          | Working temperature [°C]: | from -20 to +55              |
| Light source:                     | COB LED       | Control:                  | ON/OFF                       |
| Colour of the body:               | black         | Wire type:                | H07RN-F 3G4                  |
| Beam angle [°]:                   | 30            | Cable length [m]:         | 0.50                         |
| Supply voltage [V]:               | 220 - 240     | Category type:            | accent lighting              |
| Frequency [Hz]:                   | 50 - 60       | LED lifespan L90B10 [h]:  | 60000                        |
| Dimensions (H/W/T/S) [mm]:        | φ194          | Warranty [years]:         | 5                            |
| Electrical protection class:      | I             | CE certificate:           | <a href="#">79/2024</a>      |
| Colour rendering index:           | 80            | Manual:                   | <a href="#">Download PDF</a> |
| Material of the body:             | aluminium     |                           |                              |

## LIGHT CURVES

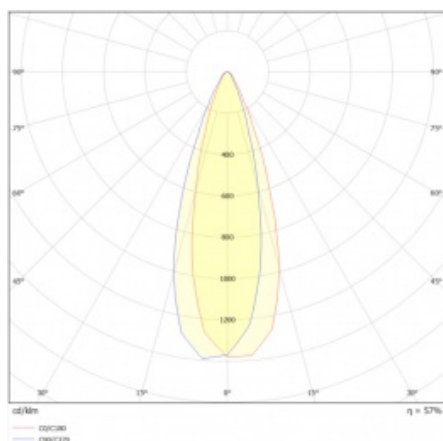

Card creation date: 11 September 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 79/2024