

ILUMI GROUND S 1450LM 840 IP67 I CL. 10° SILVER ALU 17W

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|------------------------------------|-----------|
| Index: | 377242 |
| Rated power of the luminaire [W]*: | 17 |
| Ingress protection: | IP67 |
| Impact resistance: | IK10 |
| Luminous flux [lm]*: | 1450 |
| Colour temperature [K]: | 4000 |
| Colour rendering index: | 80 |
| Material of the body: | aluminium |
| Colour of the body: | silver |
| Beam angle [°]: | 10 |

CHARACTERISTICS

The Ilumi Ground series was designed for the most demanding customers looking for customised and economical solutions. The body of the luminaire is made of cast aluminium, which has enabled a significant reduction in weight and price. A mounting box is included.

APPLICATION


The luminaires are ideal for illuminating garden or park spaces. Due to their lightweight construction, they are easy to install on external walls. The Ilumi Ground luminaire can be used to illuminate a wide range of spaces and objects, such as parks, gardens, terraces, squares, premises and plants.

DETAILED CARD


TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|---------------|----------------------------|------------------------------|
| Index: | 377242 | Ring colour: | silver |
| EAN: | 5905963377242 | Version: | S |
| Light source: | COB LED | Dimensions (H/W/T/S) [mm]: | fi148 |
| Rated power of the luminaire [W]: | 17 | Impact resistance: | IK10 |
| Supply voltage [V]: | 220 - 240 | Ingress protection: | IP67 |
| Frequency [Hz]: | 50 - 60 | Working temperature [°C]: | from -20 to +55 |
| Luminous flux [lm]: | 1450 | Control: | ON/OFF |
| Electrical protection class: | I | Wire type: | H07RN-F 3G4 |
| Colour temperature [K]: | 4000 | Cable length [m]: | 0.50 |
| Colour rendering index: | 80 | Category type: | accent lighting |
| Beam angle [°]: | 10 | LED lifespan L90B10 [h]: | 60000 |
| Material of the body: | aluminium | Warranty [years]: | 5 |
| Colour of the body: | silver | CE certificate: | 55/2025 |
| Ring material: | SST | Manual: | Download PDF |

LIGHT CURVES

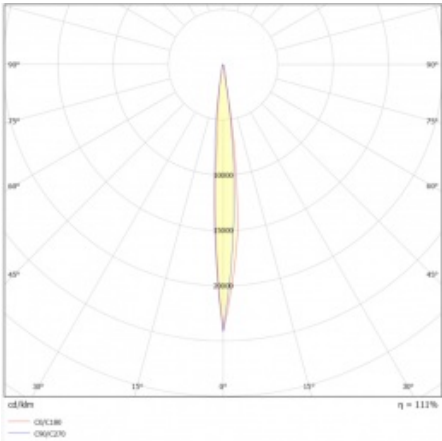

TECHNICAL PICTURES



Card creation date: 30 September 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 55/2025



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl