

# ILUMI GROUND M 3700LM 830 IP67 I CL. 10° SILVER ALU 30W

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	377266
<b>Rated power of the luminaire [W]*:</b>	30
<b>Ingress protection:</b>	IP67
<b>Impact resistance:</b>	IK10
<b>Luminous flux [lm]*:</b>	3700
<b>Colour temperature [K]:</b>	3000
<b>Colour rendering index:</b>	80
<b>Material of the body:</b>	aluminium
<b>Colour of the body:</b>	silver
<b>Beam angle [°]:</b>	10

## CHARACTERISTICS

The Ilumi Ground series was designed for the most demanding customers looking for customised and economical solutions. The body of the luminaire is made of cast aluminium, which has enabled a significant reduction in weight and price. A mounting box is included.

## APPLICATION

The luminaires are ideal for illuminating garden or park spaces. Due to their lightweight construction, they are easy to install on external walls. The Ilumi Ground luminaire can be used to illuminate a wide range of spaces and objects, such as parks, gardens, terraces, squares, premises and plants.


# ILUMI GROUND M 3700LM 830 IP67 I CL. 10° SILVER ALU 30W

DETAILED CARD


## TECHNICAL PARAMETERS TABLE

Index:	377266	Ring colour:	silver
EAN:	5905963377266	Version:	M
Light source:	COB LED	Dimensions (H/W/T/S) [mm]:	fi216.5
Rated power of the luminaire [W]:	30	Impact resistance:	IK10
Supply voltage [V]:	220 - 240	Ingress protection:	IP67
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +55
Luminous flux [lm]:	3700	Control:	ON/OFF
Electrical protection class:	I	Wire type:	H07RN-F 3G4
Colour temperature [K]:	3000	Cable length [m]:	0.50
Colour rendering index:	80	Category type:	accent lighting
Beam angle [°]:	10	LED lifespan L90B10 [h]:	60000
Material of the body:	aluminium	Warranty [years]:	5
Colour of the body:	silver	CE certificate:	<a href="#">80/2024</a>
Ring material:	SST	Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

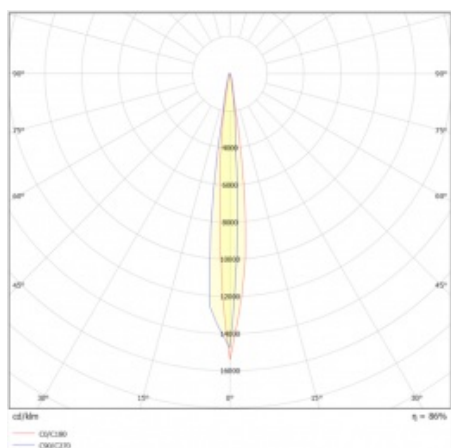

## TECHNICAL PICTURES

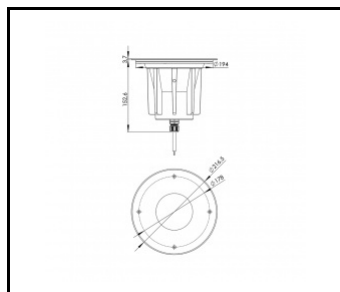

Card creation date: 30 September 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 80/2024