

ILUMI GROUND M 4060LM 840 IP67 I CL. 10° SILVER ALU 30W

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|-------------------------------------------|-----------|
| Index: | 377280 |
| Rated power of the luminaire [W]*: | 30 |
| Ingress protection: | IP67 |
| Impact resistance: | IK10 |
| Luminous flux [lm]*: | 4060 |
| Colour temperature [K]: | 4000 |
| Colour rendering index: | 80 |
| Material of the body: | aluminium |
| Colour of the body: | silver |
| Beam angle [°]: | 10 |

CHARACTERISTICS

The Ground series has been designed to achieve the best visual effect by having no screws on the front. Made from the highest quality materials and modern CREE LEDs. The Ground luminaire can be used to illuminate a wide range of locations and facilities such as:

- * parks,
- * gardens,
- * terraces,
- * squares,
- * premises,
- * plants.

APPLICATION

Ilumi Ground's outdoor ground-mounted luminaires can be used to light and illuminate a wide range of places and objects, including but not limited to:

- * parks,
- * gardens,
- * monuments,
- * squares,
- * fountains.


ILUMI GROUND M 4060LM 840 IP67 I CL. 10° SILVER ALU 30W

DETAILED CARD


TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|---------------|----------------------------|------------------------------|
| Index: | 377280 | Ring colour: | silver |
| EAN: | 5905963377280 | Version: | M |
| Light source: | LED module | Dimensions (H/W/T/S) [mm]: | fi216.5 |
| Rated power of the luminaire [W]: | 30 | Impact resistance: | IK10 |
| Supply voltage [V]: | 220 - 240 | Ingress protection: | IP67 |
| Frequency [Hz]: | 50 - 60 | Working temperature [°C]: | from -20 to +55 |
| Luminous flux [lm]: | 4060 | Control: | ON/OFF |
| Electrical protection class: | I | Wire type: | H07RN-F 3G4 |
| Colour temperature [K]: | 4000 | Cable length [m]: | 0.50 |
| Colour rendering index: | 80 | Category type: | accent lighting |
| Beam angle [°]: | 10 | LED lifespan L90B10 [h]: | 60000 |
| Material of the body: | aluminium | Warranty [years]: | 5 |
| Colour of the body: | silver | CE certificate: | 80/2024 |
| Ring material: | SST | Manual: | Download PDF |

LIGHT CURVES

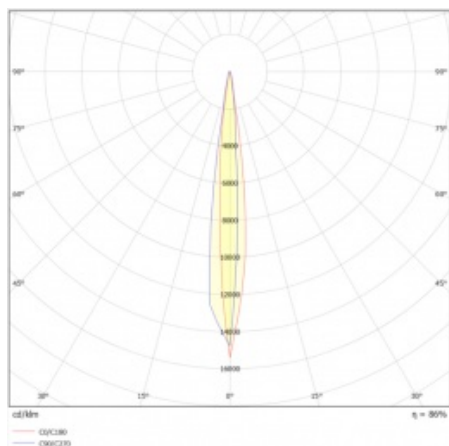

TECHNICAL PICTURES



Card creation date: 05 September 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 80/2024



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl