

ILUMI GROUND M 3550LM 840 IP67 I CL. 30° SILVER ALU 30W

DETAILED CARD



TECHNICAL PARAMETERS

Index:	377297
Rated power of the luminaire [W]*:	30
Ingress protection:	IP67
Impact resistance:	IK10
Luminous flux [lm]*:	3550
Colour temperature [K]:	4000
Colour rendering index:	80
Material of the body:	aluminium
Colour of the body:	silver
Beam angle [°]:	30

CHARACTERISTICS

The Ilumi Ground series was designed for the most demanding customers looking for customised and economical solutions. The body of the luminaire is made of cast aluminium, which has enabled a significant reduction in weight and price. A mounting box is included.

APPLICATION

The luminaires are ideal for illuminating garden or park spaces. Due to their lightweight construction, they are easy to install on external walls. The Ilumi Ground luminaire can be used to illuminate a wide range of spaces and objects, such as parks, gardens, terraces, squares, premises and plants.


ILUMI GROUND M 3550LM 840 IP67 I CL. 30° SILVER ALU 30W

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	377297	Ring colour:	silver
EAN:	5905963377297	Version:	M
Light source:	COB LED	Dimensions (H/W/T/S) [mm]:	fi216.5
Rated power of the luminaire [W]:	30	Impact resistance:	IK10
Supply voltage [V]:	220 - 240	Ingress protection:	IP67
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +55
Luminous flux [lm]:	3550	Control:	ON/OFF
Electrical protection class:	I	Wire type:	H07RN-F 3G4
Colour temperature [K]:	4000	Cable length [m]:	0.50
Colour rendering index:	80	Category type:	accent lighting
Beam angle [°]:	30	LED lifespan L90B10 [h]:	60000
Material of the body:	aluminium	Warranty [years]:	5
Colour of the body:	silver	CE certificate:	55/2025
Ring material:	SST	Manual:	Download PDF

LIGHT CURVES

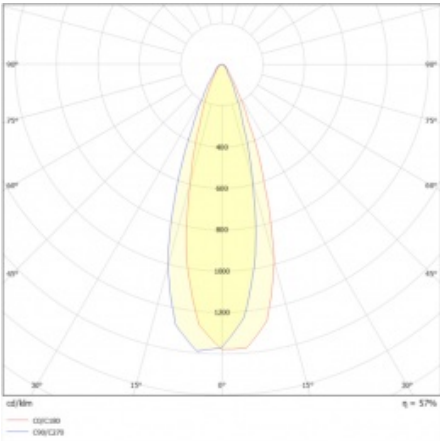

TECHNICAL PICTURES

