

ILUMI GROUND M 4060LM 840 IP67 I CL. 30° SILVER ALU 30W

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|-------------------------------------------|-----------|
| Index: | 377297 |
| Rated power of the luminaire [W]*: | 30 |
| Ingress protection: | IP67 |
| Impact resistance: | IK10 |
| Luminous flux [lm]*: | 4060 |
| Colour temperature [K]: | 4000 |
| Colour rendering index: | 80 |
| Material of the body: | aluminium |
| Colour of the body: | silver |
| Beam angle [°]: | 30 |

CHARACTERISTICS

The Ilumi Ground series was designed for the most demanding customers looking for customised and economical solutions. The body of the luminaire is made of cast aluminium, which has enabled a significant reduction in weight and price. A mounting box is included.

APPLICATION

The luminaires are ideal for illuminating garden or park spaces. Due to their lightweight construction, they are easy to install on external walls. The Ilumi Ground luminaire can be used to illuminate a wide range of spaces and objects, such as parks, gardens, terraces, squares, premises and plants.


ILUMI GROUND M 4060LM 840 IP67 I CL. 30° SILVER ALU 30W

DETAILED CARD


TECHNICAL PARAMETERS TABLE

| | | | |
|-----------------------------------|---------------|---------------------------|------------------------------|
| Rated power of the luminaire [W]: | 30 | Colour of the body: | silver |
| Index: | 377297 | Ring material: | SST |
| Colour temperature [K]: | 4000 | Ring colour: | silver |
| EAN: | 5905963377297 | Impact resistance: | IK10 |
| Luminous flux [lm]: | 4060 | Ingress protection: | IP67 |
| Light source: | COB LED | Working temperature [°C]: | from -20 to +55 |
| Version: | M | Control: | ON/OFF |
| Beam angle [°]: | 30 | Wire type: | H07RN-F 3G4 |
| Supply voltage [V]: | 220 - 240 | Cable length [m]: | 0.50 |
| Dimensions (H/W/T/S) [mm]: | fi216.5 | Category type: | accent lighting |
| Frequency [Hz]: | 50 - 60 | LED lifespan L90B10 [h]: | 60000 |
| Electrical protection class: | I | Warranty [years]: | 5 |
| Colour rendering index: | 80 | CE certificate: | 80/2024 |
| Material of the body: | aluminium | Manual: | Download PDF |

LIGHT CURVES

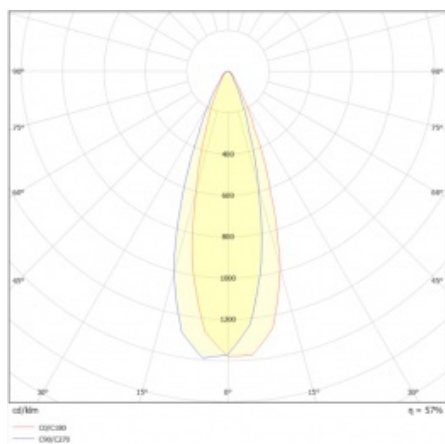

TECHNICAL PICTURES



Card creation date: 30 September 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 80/2024



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl