

# OCULUS LED S ECO GREY RAL9006 245X143MM 24700LM 740 I CL, IP65 120D (150W)

DETAILED CARD



## TECHNICAL PARAMETERS

|                                           |        |
|-------------------------------------------|--------|
| <b>Index:</b>                             | 744723 |
| <b>Ingress protection:</b>                | IP65   |
| <b>Impact resistance:</b>                 | IK08   |
| <b>Rated power of the luminaire [W]*:</b> | 150    |
| <b>Luminous flux [lm]*:</b>               | 24700  |
| <b>Colour temperature [K]:</b>            | 4000   |
| <b>Color rendering index (Ra) &gt;:</b>   | 70     |
| <b>SDCM:</b>                              | 3      |
| <b>Electrical protection class:</b>       | I      |
| <b>Energy efficiency class:</b>           | B      |

## CHARACTERISTICS

The Oculus LED S ECO is a HIGH-BAY luminaire made using LED technology. After the Oculus LED XS ECO, it is the smallest representative of the renowned OCULUS LED series, with dimensions optimised for maximum power obtained from a body made of die-cast aluminium, powder-coated in black or grey. The passive cooling system and the isolated power supply (black) have a positive effect on the thermal management of the lamp, its service life and the maintenance of the highest performance. LED modules with high luminous efficacy (up to 160 lm/W) ensure that the required lighting levels are achieved while saving energy and reducing purchasing costs. The diffuser is made of tempered glass, which does not alter the optics of the light source - providing a general distribution of 120 degrees. The lamp is terminated with electrical cables (which require an airtight connector if the connection is to be IP65 tight). The design of the lamp is suitable for pendant mounting using the threaded, eyebolt hook supplied. The lamp should be suspended using a cord or chain dedicated to such solutions (not supplied).

## APPLICATION

The luminaire is designed for suspended mounting (using chains, cables, etc.) indoors, even in high humidity (IP65). It is ideal for factories and production halls as well as large warehouses and logistics centres.


# OCULUS LED S ECO GREY RAL9006 245X143MM 24700LM 740 I CL, IP65 120D (150W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |               |                                          |                                               |
|-----------------------------------|---------------|------------------------------------------|-----------------------------------------------|
| Index:                            | 744723        | Colour of the body:                      | gray RAL 9006                                 |
| EAN:                              | 5905963744723 | Dimensions (H/W/T/S) [mm]:               | 143/245/245                                   |
| Light source:                     | LED           | Impact resistance:                       | IK08                                          |
| Rated power of the luminaire [W]: | 150           | Ingress protection:                      | IP65                                          |
| Luminous flux [lm]:               | 24700         | Working temperature [°C]:                | from -20 to +35                               |
| Supply voltage [V]:               | 220-240       | LED lifespan L70B50 [h]:                 | 150000                                        |
| Frequency [Hz]:                   | 50-60         | LED lifespan L80B10 [h]:                 | 94000                                         |
| Luminous efficacy [lm/W]:         | 165           | LED lifespan L90B10 [h]:                 | 43000                                         |
| Energy efficiency class:          | B             | Number on the palette [pcs]:             | 84                                            |
| Electrical protection class:      | I             | Net weight [kg]:                         | 2.400                                         |
| Colour temperature [K]:           | 4000          | Light distribution type:                 | symmetric                                     |
| Color rendering index (Ra) >:     | 70            | Warranty [years]:                        | 5                                             |
| SDCM:                             | 3             | CE certificate:                          | <a href="#">82/2024</a>                       |
| Beam angle [°]:                   | 120           | Environmental Product Declaration (EPD): | <a href="#">816/2025</a>                      |
| Surge protection [kV]:            | 1             | Manual:                                  | <a href="#">Download PDF</a>                  |
| Remarks:                          | RAL9006       | ISO Certificates:                        | 9001:2015, 14001:2015, 45001:2018, 50001:2018 |
| Diffuser material:                | glass         | Pliik LDT:                               | <a href="#">Download</a>                      |
| Material of the body:             | aluminium     |                                          |                                               |

## LIGHT CURVES

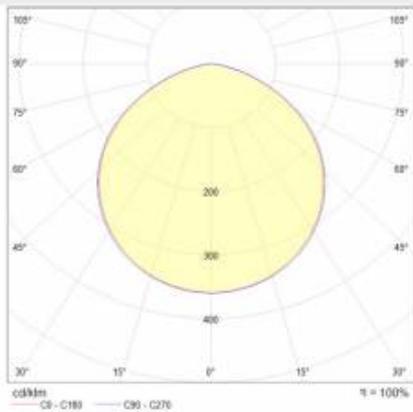

# OCULUS LED S ECO GREY RAL9006 245X143MM 24700LM 740 I CL, IP65 120D (150W)

DETAILED CARD

## ACCESSORIES AVAILABLE

| index  | Name                                                     |
|--------|----------------------------------------------------------|
| 626104 | IP68 quick connector 0.5-2.5mm <sup>2</sup> Dia5-10mm 3P |



IP68 quick connector 0.5-2.5mm<sup>2</sup>  
Dia5-10mm 3P (626104)

Card creation date: 19 September 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 82/2024