

# TYTAN STEEL LED 600MM 2150LM 840 IP65 105D 14W

DETAILED CARD



## TECHNICAL PARAMETERS

|   |              |
|---|--------------|
| <b>Index:</b>                             | 596438       |
| <b>Ingress protection:</b>                | IP65         |
| <b>Impact resistance:</b>                 | IK06         |
| <b>Rated power of the luminaire [W]*:</b> | 14           |
| <b>Luminous flux [lm]*:</b>               | 2150         |
| <b>Colour temperature [K]:</b>            | 4000         |
| <b>Material of the body:</b>              | coated steel |
| <b>Colour of the body:</b>                | white        |
| <b>Diffuser material:</b>                 | PC           |
| <b>Diffuser type:</b>                     | matrix led   |

## CHARACTERISTICS

The Tytan Steel LED reflects an innovative approach to the classic hermetic luminaire that combines functionality with aesthetics. All the technical advantages of a traditional hermetic luminaire are encapsulated in a sleek, low profile, giving the lamp a modern design. Thanks to its advanced optics, the Tytan Steel LED will be suitable for both the simplest applications and demanding industrial solutions. The product is characterised by exceptional ease of installation, low purchase and operating costs (169 lm/W). The reliable components used in the lamp minimise the need for servicing. The Tytan Steel LED is made of steel for exceptional durability and, thanks to its U-shaped profile design, retains the lightness typical of plastic luminaires, making it easy to install and not weighing down load-bearing structures. The Tytan Steel LED is the optimum combination of functionality and economy, ideal for a wide range of applications.

## APPLICATION

The multi-purpose LED luminaire is designed for use in areas with high dust- and water-tightness requirements. It is particularly recommended for the illumination of industrial and warehouse halls, garages, car parks (underground and multi-storey), public facilities including hospitals, educational and educational facilities, retail and service facilities, transport terminals and underground passages. The lamp is ideal for new lighting applications as well as replacing traditional fluorescent luminaires with energy-efficient LED solutions. Its design is suitable for surface-mounted and suspended installation.


# TYTAN STEEL LED 600MM 2150LM 840 IP65 105D 14W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |               |                              |   |
|-----------------------------------|---------------|------------------------------|---|
| Rated power of the luminaire [W]: | 14            | Diffuser material:           | PC  |
| Index:                            | 596438        | Diffuser type:               | matrix led  |
| Colour temperature [K]:           | 4000          | Material of the body:        | coated steel  |
| EAN:                              | 5905963596438 | Remarks:                     | RAL9010   |
| Luminous flux [lm]:               | 2150          | Dimensions (H/W/T/S) [mm]:   | 600/57/45   |
| Light source:                     | LED module    | Mounting dimensions [mm]:    | 520   |
| Beam angle [°]:                   | 105           | Impact resistance:           | IK06  |
| Supply voltage [V]:               | 220-240       | Ingress protection:          | IP65  |
| Light distribution type:          | symmetric     | Mounting version:            | surface, suspended  |
| Frequency [Hz]:                   | 50-60         | Number on the palette [pcs]: | 165   |
| Luminous efficacy [lm/W]:         | 154           | Net weight [kg]:             | 0.850   |
| Energy efficiency class:          | C             | Working temperature [°C]:    | from +35 to -20   |
| Electrical protection class:      | I             | Photobiological safety:      | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Colour rendering index:           | >80           | Warranty [years]:            | 5   |
| SDCM:                             | ≤ 3           | CE certificate:              | <a href="#">86/2024</a>   |
| LED lifespan L70B50 [h]:          | 140000        | Manual:                      | <a href="#">Download PDF</a>  |
| LED lifespan L80B20 [h]:          | 88000         | Plik LDT:                    | <a href="#">Download</a>  |
| LED lifespan L90B10 [h]:          | 42000         |                              |   |
| Surge protection [kV]:            | 2             |                              |   |
| Colour of the body:               | white         |                              |   |

## LIGHT CURVES

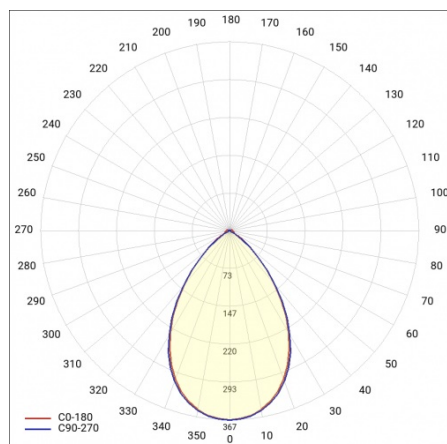

Card creation date: 15 October 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 86/2024



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl