


MESSAGGIO 1261MM 3650LM 840 IP20 I CL. DALI 57W

RAL9016/RAL2004

DETAILED CARD

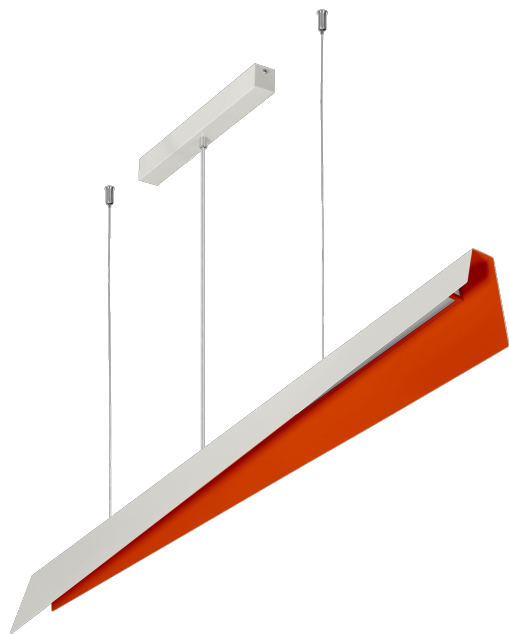

TECHNICAL PARAMETERS

Index:	579448
Light source:	LED
Rated power [W] - range:	57
Luminous flux of the luminaire [lm] - range:	3650
Supply voltage [V]:	220 - 240
Frequency [Hz]:	50 - 60
Electrical protection class:	I
Colour temperature [K]:	4000
Ingress protection:	IP20
Diffuser material:	PC

CHARACTERISTICS

The MESSAGGIO collection, designed by Dorota Koziara, includes pendant lamps with a minimalist form. They can come in all RAL colors, including a multicolor version, where the outside of the housing and the inside of the lamp have different colors. In this way, MESSAGGIO provides unlimited design possibilities.

Thanks to the possibility of adjusting the length of the pendants from the MESSAGGIO lamps, surprising light compositions can be created. Versions with DALI control allow you to change the value of the light output, which further enhances the decorative effect. The milky lampshade is made of PC, while the housing is made of solid yet visually delicate steel, which ensures the durability of the product.

APPLICATION

MESSAGGIO is a collection within which it is possible to create multicolor variants of lamps. In addition, the juxtaposition of their different versions - pendant, wall sconces and standing - allows you to create phenomenal light-decorative compositions, which will work well in places such as hotels, restaurants, art galleries, shopping malls, representative spaces, as well as private homes.

MESSAGGIO 1261MM 3650LM 840 IP20 I CL. DALI 57W

RAL9016/RAL2004

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	579448
EAN:	5905963579448
Light source:	LED
Rated power [W] - range:	57
Rated power of the luminaire [W]:	57
Luminous flux of the luminaire [lm] - range:	3650
Luminous flux [lm]:	3650
Supply voltage [V]:	220 - 240
Frequency [Hz]:	50 - 60
Luminous efficacy [lm/W]:	64
Electrical protection class:	I
Colour temperature [K]:	4000
SDCM:	≤ 3
LED lifespan L70B50 [h]:	99000
LED lifespan L80B20 [h]:	63000
LED lifespan L90B10 [h]:	31000
Beam angle [°]:	116x58
Light distribution type:	open space
Diffuser material:	PC

Diffuser type:	OPAL
Diffuser colour:	milky
Material of the body:	Steel
Colour of the body:	RAL9016/2004
Dimensions (H/W/T/S) [mm]:	1230/1261/80
Mounting dimensions [mm]:	340
Ingress protection:	IP20
Mounting version:	suspended
Working temperature [°C]:	from -25 to +35
Diode PCB material:	aluminium
DIMM DALI:	yes
Control:	1
Net weight [kg]:	4
Warranty [years]:	5
Category type:	decorative fixtures
CE certificate:	207/2023
Manual:	Download PDF
Plik LDT:	Download

Card creation date:12 December 2024

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 207/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl