


# MESSAGGIO 1541MM 2500-4450LM 840 IP20 I CL. 35-64W RAL9005/RAL2004

DETAILED CARD

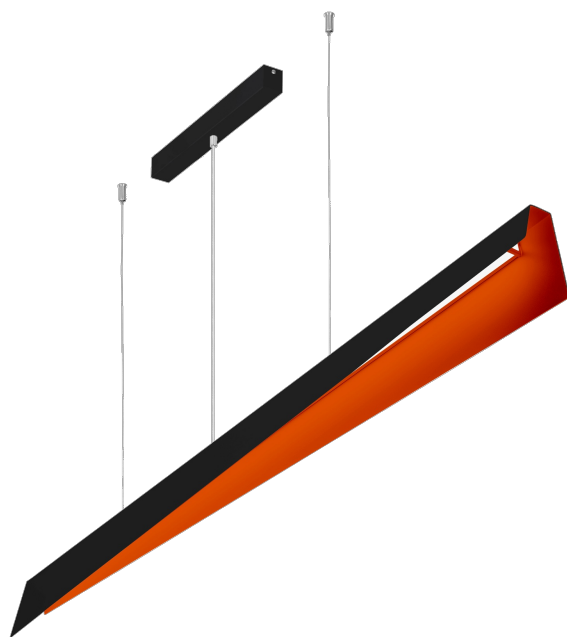

## TECHNICAL PARAMETERS

Index:	579462
Light source:	LED
Rated power [W] - range:	35 - 64
Luminous flux of the luminaire [lm] - range:	2500-4450
Supply voltage [V]:	220 - 240
Frequency [Hz]:	50 - 60
Electrical protection class:	I
Colour temperature [K]:	4000
Ingress protection:	IP20
Diffuser material:	PC

## CHARACTERISTICS

The MESSAGGIO collection, designed by Dorota Koziara, includes pendant lamps with a minimalist form. They can come in all RAL colors, including a multicolor version, where the outside of the housing and the inside of the lamp have different colors. In this way, MESSAGGIO provides unlimited design possibilities.

Thanks to the possibility of adjusting the length of the pendants from the MESSAGGIO lamps, surprising light compositions can be created. Versions with DALI control allow you to change the value of the light output, which further enhances the decorative effect. The milky lampshade is made of PC, while the housing is made of solid yet visually delicate steel, which ensures the durability of the product.

## APPLICATION

MESSAGGIO is a collection within which it is possible to create multicolor variants of lamps. In addition, the juxtaposition of their different versions - pendant, wall sconces and standing - allows you to create phenomenal light-decorative compositions, which will work well in places such as hotels, restaurants, art galleries, shopping malls, representative spaces, as well as private homes.


# MESSAGGIO 1541MM 2500-4450LM 840 IP20 I CL. 35-64W RAL9005/RAL2004

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	579462	Diffuser material:	PC
EAN:	5905963579462	Diffuser type:	OPAL
Light source:	LED	Diffuser colour:	milky
Rated power [W] - range:	35 - 64	Material of the body:	Steel
Rated power of the luminaire [W]:	35	Colour of the body:	RAL9005/2004
Luminous flux of the luminaire [lm] - range:	2500-4450	Dimensions (H/W/T/S) [mm]:	1230/1541/80
Luminous flux [lm]:	2500	Mounting dimensions [mm]:	340
Supply voltage [V]:	220 - 240	Ingress protection:	IP20
Frequency [Hz]:	50 - 60	Mounting version:	suspended
Luminous efficacy [lm/W]:	70	Working temperature [°C]:	from -25 to +35
Electrical protection class:	I	Diode PCB material:	aluminium
Colour temperature [K]:	4000	Net weight [kg]:	4.670
SDCM:	≤ 3	Warranty [years]:	5
LED lifespan L70B50 [h]:	99000	Category type:	decorative fixtures
LED lifespan L80B20 [h]:	63000	CE certificate:	<a href="#">207/2023</a>
LED lifespan L90B10 [h]:	31000	Manual:	<a href="#">Download PDF</a>
Beam angle [°]:	116x58	Plik LDT:	<a href="#">Download</a>
Light distribution type:	open space		

Card creation date:12 December 2024  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 207/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)