

# MERCURY LED RCR 8W PC OPAL IP54 3000K

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	187209/PA
<b>Ingress protection:</b>	IP54
<b>Impact resistance:</b>	IK10
<b>Nominal power [W]:</b>	8
<b>Luminous flux [lm]*:</b>	700
<b>Colour temperature [K]:</b>	3000
<b>SDCM:</b>	≤ 3
<b>Energy efficiency class:</b>	F
<b>Material of the body:</b>	PP
<b>Diffuser material:</b>	PC

## CHARACTERISTICS

Surface mounted, round LED light fixture with a high luminous flux (94 lm/W), high ingress protection class IP54 and an integrated energy-saving light source LED GO!. Base and ring made of UV-resistant plastic. Specially formed diffuser made of impact resistant PC ensures the highest impact resistance of the fitting (IK10). Available in white; optional equipment: radio motion sensor (RCR). Color temperature 3000K/4000K, CRI>80, lifespan of LED 50 000h (L70B50) ta= 25 °C.

## APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for outdoor (façade lighting) or indoor use (rooms with high humidity, passageways). Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms.


# MERCURY LED RCR 8W PC OPAL IP54 3000K

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Nominal power [W]:	8	Diffuser material:	PC
Light source:	LED module	Material of the body:	PP
Colour temperature [K]:	3000	Colour of the body:	white
Luminous flux [lm]:	700	Dimensions (H/W/T/S) [mm]:	ø255/85
Rated power of the luminaire [W]:	9	Impact resistance:	IK10
Supply voltage [V]:	220-240	Ingress protection:	IP54
Diffuser type:	OPAL	Mounting version:	surface
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -20 to +35
Motion sensor:	yes	Net weight [kg]:	0.620
Luminous efficacy [lm/W]:	78	Warranty [years]:	5
Energy efficiency class:	F	Index:	187209/PA
Electrical protection class:	I	CE certificate:	<a href="#">399/2023</a>
Colour rendering index:	>80	EAN:	5905963187209
SDCM:	≤ 3	Category type:	bulkheads
Power factor:	0.53	ETIM class:	EC002892
LED lifespan L70B50 [h]:	50000	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Beam angle [°]:	120	Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

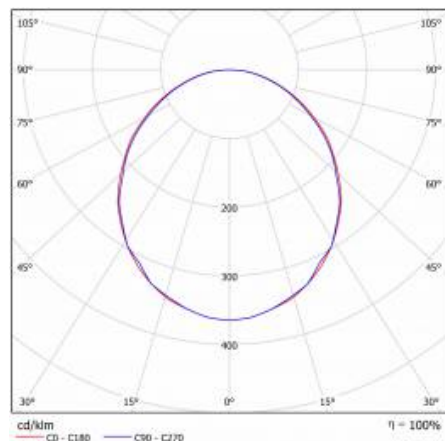

Card creation date: 10 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 399/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)