

# SKVER S Z2 3450LM 740 RM7 MF IP66 II CL. DALI ZG B 0 (23W)

DETAILED CARD



## TECHNICAL PARAMETERS

Index:	803055
Ingress protection:	IP66
Impact resistance:	IK10
Rated power of the luminaire [W]*:	23
Luminous flux [lm]*:	3450
Colour temperature [K]:	4000
Color rendering index (Ra) >:	70
Electrical protection class:	II
Optics:	RM7
Control:	Yes + 5-stage power reduction

## CHARACTERISTICS

**Skver LED S (Z2 MF)** modular, pole-mounted, decorative, innovative park and city LED luminaire with tool-free access to the equipment compartment, equipped with a tool-free service plate compliant with the ZhagaBook 13 and 15 standard. Made of pressure-formed aluminum, equipped with a flat glass shade, characterized by a ULR = 0 coefficient, maximum resistance to mechanical impact and an increased color rendering index. The luminaire is available in variants with an omnidirectional and directed way of lighting. The luminaire allows the use of dedicated functional accessories in the form of a screen that limits disturbing glare.

## APPLICATION

Skver LED S (Z2 MF) is ideal for biologically active spaces, where the protection of the dark sky plays a special role, such as parks, squares, urban green islands, urban interiors in accordance with the photometric project, pedestrian routes, residential roads, parking lots and gardens. The luminaire is also suitable for lighting streets and roads of class M4 and M5. Thanks to the ULR = 0 index, it protects the urban ecosystem from excessive light emission into the upper half-space, restoring the dark night sky over cities.


# SKVER S Z2 3450LM 740 RM7 MF IP66 II CL. DALI ZG B 0 (23W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	803055	Material of the body:	powder coated aluminium
EAN:	5905963803055	Colour of the body:	black
Category type:	Park and city lighting	Dimensions (H/W/T/S) [mm]:	386/360/476
Version:	S	Mounting dimensions [mm]:	ø76
Light source:	LED module	Impact resistance:	IK10
Rated power of the luminaire [W]:	23	Ingress protection:	IP66
Supply voltage [V]:	220-240	Mounting version:	top
Frequency [Hz]:	47-63	Working temperature [°C]:	from -40 to +50
Luminous flux [lm]:	3450	LED lifespan L95B10 [h]:	100000
Luminous efficacy [lm/W]:	156	DIMM DALI:	yes
Energy efficiency class:	C	Control:	Yes + 5-stage power reduction
Electrical protection class:	II	Protection type:	NTC
Colour temperature [K]:	4000	Net weight [kg]:	7
Color rendering index (Ra) >:	70	Wire type:	HO7 RNF-2x1
Power factor:	0.96	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Surge protection [kV]:	10	Technical Warranty:	5 with the possibility of extension to 10
Diffuser material:	tempered glass	ENEC Certificate:	<a href="#">0351/ENEC/24/M1;</a> <a href="#">0121/ENEC+/24/M2</a>
Diffuser type:	transparent	CE certificate:	<a href="#">05/2025</a>
Optics material:	PMMA + PC	Zhaga-D4i:	<a href="#">ZG430121062024</a>
Optics:	RM7	Environmental Product Declaration (EPD):	<a href="#">683/2024</a>
Exchangeable source:	yes	Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

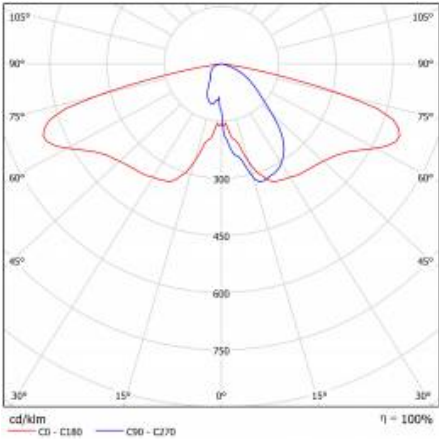

# SKVER S Z2 3450LM 740 RM7 MF IP66 II CL. DALI ZG B 0 (23W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
435461	SKVER cover fi 48mm
435478	SKVER cover fi 60mm
584534	Key for opening Tiara XS / Skver

Card creation date: 04 February 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 05/2025



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl