# FACTOR LED 2M 59200LM 740 RM3 DALI IP66 SH (466W) C5-M

DETAILED CARD



## TECHNICAL PARAMETERS

| | |
|---|---|
| **Index:** | 682353 |
| **Ingress protection:** | IP66 |
| **Impact resistance:** | IK09 |
| **Rated power of the luminaire [W]*:** | 466 |
| **Luminous flux [lm]*:** | 59200 |
| **Colour temperature [K]:** | 4000 |
| **Color rendering index (Ra) >:** | 70 |
| **SDCM:** | 5 |
| **Electrical protection class:** | I |
| **Energy efficiency class:** | D |

## CHARACTERISTICS

Factor Led C5-M (corrosion protection in harsh industrial and marine environments) is the latest generation of high-powered floodlight with impressive lumen output. It is characterised not only by very high luminous efficiency, but also by high IP66 sealing and IK09 impact resistance. These parameters were achieved thanks to the branded components used, the robust housing made of cast aluminium LM-6 (aluminium-silicon alloy) and the use of a passive lamp cooling system, which allows excess heat generation to be dissipated during lamp operation. In the C5-M version, the paint coating plays an even more important role. The Factor Led has the advantage of being very quick and easy to install. The lightweight steel arm is attached to the supporting structure (wall, column) and then the light modules are plugged in. On one bracket, the installer can plug in a lamp containing 1 to 4 such modules.

## APPLICATION

Ports, wharves, shipyards, oil rigs and offshore infrastructure, chemical industry and refineries, bridges and infrastructure exposed to marine conditions, lighting on ships and ferries, industrial areas, playing fields, airports, car parks with high humidity and salinity.

# FACTOR LED 2M 59200LM 740 RM3 DALI IP66 SH (466W) C5-M


DETAILED CARD

## TECHNICAL PARAMETERS TABLE

| | |
|---|---|
| **Index:** | 682353 |
| **EAN:** | 5905963682353 |
| **Light source:** | LED module |
| **Rated power of the luminaire [W]:** | 466 |
| **Luminous flux [lm]:** | 59200 |
| **Supply voltage [V]:** | 100-277 |
| **Frequency [Hz]:** | 47-63 |
| **Luminous efficacy [lm/W]:** | 127 |
| **Energy efficiency class:** | D |
| **Electrical protection class:** | I |
| **Colour temperature [K]:** | 4000 |
| **Color rendering index (Ra) >:** | 70 |
| **SDCM:** | 5 |
| **Power factor:** | 0.97 |
| **LED lifespan L70B50 [h]:** | 156000 |
| **LED lifespan L80B10 [h]:** | 108000 |
| **LED lifespan L90B10 [h]:** | 108000 |
| **Beam angle [°]:** | RM3 |
| **Surge protection [kV]:** | 6 |
| **Diffuser material:** | tempered glass |
| **Material of the body:** | aluminium |

| | |
|---|---|
| **Colour of the body:** | RAL7016 |
| **Dimensions (H/W/T/S) [mm]:** | 385/425/340 |
| **Mounting dimensions [mm]:** | 310 |
| **Impact resistance:** | IK09 |
| **Ingress protection:** | IP66 |
| **Mounting version:** | top |
| **Working temperature [°C]:** | from -40 to +45 |
| **DIMM DALI:** | yes |
| **The number of implement units:** | 2 |
| **Dimensions of single box [mm]:** | 430 |
| **Number on the palette [pcs]:** | 18 |
| **Net weight [kg]:** | 13.900 |
| **Version:** | 2 modules |
| **Light distribution type:** | RM3 |
| **Corrosivity category:** | C5-M |
| **Warranty [years]:** | 5 |
| **CE certificate:** | 262/2023 |
| **ENEC Certificate:** | 0404/ENEC/25 |
| **Environmental Product Declaration (EPD):** | 816/2025 |
| **Manual:** | Download PDF |
| **Plik LDT:** | Download |


## LIGHT CURVES

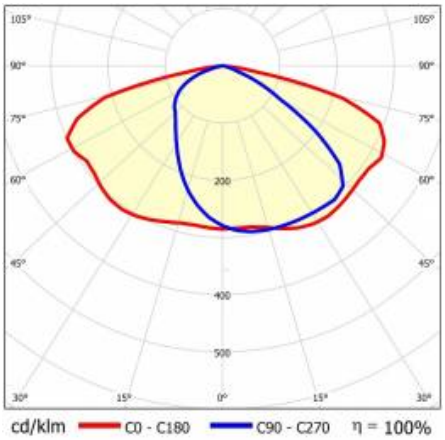

# FACTOR LED 2M 59200LM 740 RM3 DALI IP66 SH (466W) C5-M

DETAILED CARD

**TECHNICAL PICTURES**

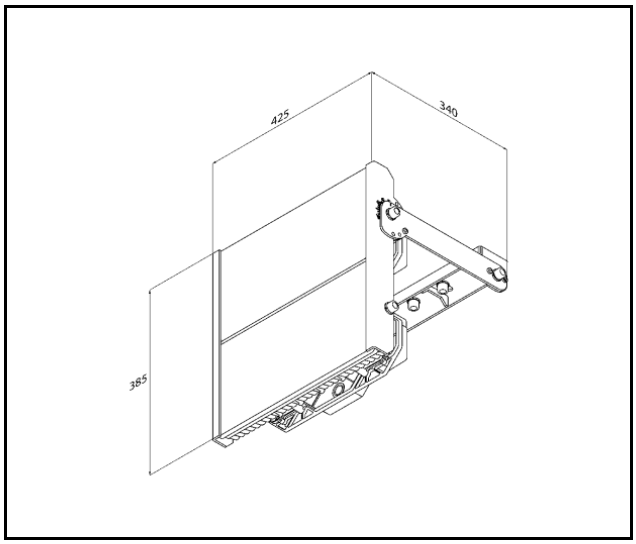


# FACTOR LED 2M 59200LM 740 RM3 DALI IP66 SH (466W) C5-M


DETAILED CARD

## ACCESSORIES AVAILABLE


| index | Name |
|---|---|
| 684791 | Protective grid Factor LED 4M RAL7016 |
| 684784 | Protective grid Factor LED 3M RAL7016 |
| 684777 | Protective grid Factor LED 2M RAL7016 |
| 684760 | Protective grid Factor LED 1M RAL7016 |
| 994883 | Factor one-piece protective visor |
| 994913 | Factor ABC multi-piece protective visor |
| 994906 | Factor AB multi-piece protective visor |
| 994890 | Factor Multi-piece protective visor A |



Protective grid Factor LED 4M RAL7016 (684791)



Protective grid Factor LED 3M RAL7016 (684784)



Protective grid Factor LED 2M RAL7016 (684777)

Card creation date: 19 February 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 262/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl