

# FACTOR LED 1M 26300LM 740 PP1 IP66 SH (194W) C5-M

DETAILED CARD



## TECHNICAL PARAMETERS

|   |        |
|---|--------|
| <b>Index:</b>                             | 682087 |
| <b>Ingress protection:</b>                | IP66   |
| <b>Impact resistance:</b>                 | IK09   |
| <b>Rated power of the luminaire [W]*:</b> | 194    |
| <b>Luminous flux [lm]*:</b>               | 26300  |
| <b>Colour temperature [K]:</b>            | 4000   |
| <b>Colour rendering index:</b>            | >70    |
| <b>SDCM:</b>                              | ≤ 5    |
| <b>Electrical protection class:</b>       | I      |
| <b>Energy efficiency class:</b>           | D      |

## CHARACTERISTICS

Factor Led C5-M (corrosion protection in harsh industrial and marine environments) is the latest generation of high-powered floodlight with impressive lumen output. It is characterised not only by very high luminous efficiency, but also by high IP66 sealing and IK09 impact resistance. These parameters were achieved thanks to the branded components used, the robust housing made of cast aluminium LM-6 (aluminium-silicon alloy) and the use of a passive lamp cooling system, which allows excess heat generation to be dissipated during lamp operation. In the C5-M version, the paint coating plays an even more important role. The Factor Led has the advantage of being very quick and easy to install. The lightweight steel arm is attached to the supporting structure (wall, column) and then the light modules are plugged in. On one bracket, the installer can plug in a lamp containing 1 to 4 such modules.

## APPLICATION

Ports, wharves, shipyards, oil rigs and offshore infrastructure, chemical industry and refineries, bridges and infrastructure exposed to marine conditions, lighting on ships and ferries, industrial areas, playing fields, airports, car parks with high humidity and salinity.


# FACTOR LED 1M 26300LM 740 PP1 IP66 SH (194W) C5-M

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |                |                                |                              |
|-----------------------------------|----------------|--------------------------------|------------------------------|
| Rated power of the luminaire [W]: | 194            | LED lifespan L90B10 [h]:       | 47000                        |
| Index:                            | 682087         | Surge protection [kV]:         | 6                            |
| EAN:                              | 5905963682087  | Dimensions (H/W/T/S) [mm]:     | 191/425/217                  |
| Luminous flux [lm]:               | 26300          | Material of the body:          | aluminium                    |
| Light source:                     | LED module     | Colour of the body:            | RAL7016                      |
| Beam angle [°]:                   | PP1            | Mounting dimensions [mm]:      | 230                          |
| Diffuser material:                | tempered glass | Impact resistance:             | IK09                         |
| Version:                          | 1 module       | Ingress protection:            | IP66                         |
| Supply voltage [V]:               | 220-240        | Mounting version:              | top                          |
| Frequency [Hz]:                   | 47-63          | Working temperature [°C]:      | from -40 to +45              |
| Luminous efficacy [lm/W]:         | 136            | Dimensions of single box [mm]: | 430                          |
| Energy efficiency class:          | D              | Number on the palette [pcs]:   | 35                           |
| Electrical protection class:      | I              | Net weight [kg]:               | 5.640                        |
| Colour temperature [K]:           | 4000           | Light distribution type:       | PP1                          |
| Colour rendering index:           | >70            | Corrosivity category:          | C5-M                         |
| SDCM:                             | ≤ 5            | Warranty [years]:              | 5                            |
| Power factor:                     | 0.98           | CE certificate:                | <a href="#">262/2023</a>     |
| LED lifespan L70B50 [h]:          | 156000         | ENEC Certificate:              | <a href="#">0404/ENEC/25</a> |
| LED lifespan L80B20 [h]:          | 98000          | Manual:                        | <a href="#">Download PDF</a> |

## LIGHT CURVES

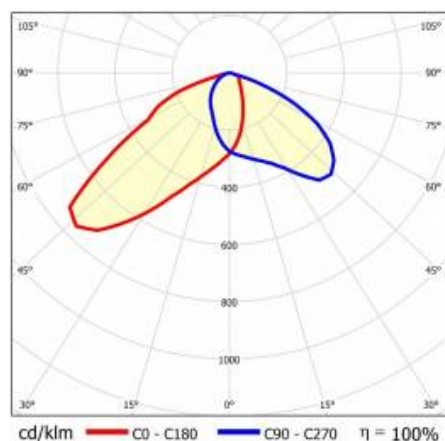

Card creation date: 19 February 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 262/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)