

# FACTOR LED HB 2M 33200LM 740 120D IP66 SH (240W) C5-M

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	682964
<b>Ingress protection:</b>	IP66
<b>Impact resistance:</b>	IK09
<b>Rated power of the luminaire [W]*:</b>	240
<b>Luminous flux [lm]*:</b>	33200
<b>Colour temperature [K]:</b>	4000
<b>Colour rendering index:</b>	>70
<b>SDCM:</b>	≤ 5
<b>Electrical protection class:</b>	I
<b>Energy efficiency class:</b>	C

## CHARACTERISTICS

Factor Led HB C5-M (corrosion protection in harsh industrial and marine environments) is the latest generation of high bay with high power and high lumen output. It is characterised not only by very high luminous efficacy, but also by high IP66 sealing and IK09 impact resistance. These parameters are achieved thanks to the branded components used, the robust housing made of cast aluminium LM-6 (aluminium-silicon alloy) and the use of a passive lamp cooling system, which allows excess heat generation to be dissipated during lamp operation. In the C5-M version, the paint coating plays an even more important role. The Factor Led has the advantage of being very quickly and easily suspended or surface-mounted. The design allows the hanging or mounting of a lamp consisting of one or two light modules.

## APPLICATION

Ports, wharves, shipyards, oil rigs and offshore infrastructure, chemical industry and refineries, bridges and infrastructure exposed to marine conditions, lighting on ships and ferries, industrial areas, playing fields, airports, car parks with high humidity and salinity.


# FACTOR LED HB 2M 33200LM 740 120D IP66 SH (240W) C5-M

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Rated power of the luminaire [W]:</b>	240	<b>Surge protection [kV]:</b>	6
<b>Index:</b>	682964	<b>Dimensions (H/W/T/S) [mm]:</b>	387/397/125
<b>EAN:</b>	5905963682964	<b>Material of the body:</b>	aluminium
<b>Luminous flux [lm]:</b>	33200	<b>Colour of the body:</b>	RAL7016
<b>Beam angle [°]:</b>	120	<b>Mounting dimensions [mm]:</b>	357/273
<b>Diffuser material:</b>	tempered glass	<b>Impact resistance:</b>	IK09
<b>Diffuser type:</b>	transparent	<b>Ingress protection:</b>	IP66
<b>Supply voltage [V]:</b>	220-240	<b>Mounting version:</b>	surface-mounted or suspended
<b>Luminous efficacy [lm/W]:</b>	138	<b>Working temperature [°C]:</b>	from -40 to +45
<b>Energy efficiency class:</b>	C	<b>Dimensions of single box [mm]:</b>	430
<b>Electrical protection class:</b>	I	<b>Number on the palette [pcs]:</b>	18
<b>Colour temperature [K]:</b>	4000	<b>Net weight [kg]:</b>	9.380
<b>Colour rendering index:</b>	>70	<b>Version:</b>	2 modules
<b>SDCM:</b>	≤ 5	<b>Corrosivity category:</b>	C5-M
<b>Power factor:</b>	0.98	<b>Warranty [years]:</b>	5
<b>LED lifespan L70B50 [h]:</b>	156000	<b>CE certificate:</b>	<a href="#">263/2023</a>
<b>LED lifespan L80B20 [h]:</b>	98000	<b>ENEC Certificate:</b>	<a href="#">0404/ENEC/25</a>
<b>LED lifespan L90B10 [h]:</b>	47000	<b>Manual:</b>	<a href="#">Download PDF</a>

## LIGHT CURVES

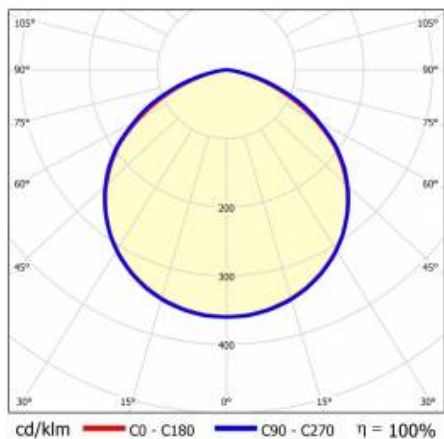

Card creation date: 19 February 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 263/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)