


BARIS 52 LED Z LAMPA L 2100LM 840 IP20 I CL. PRM BLACK 17W SINGLE

DETAILED CARD

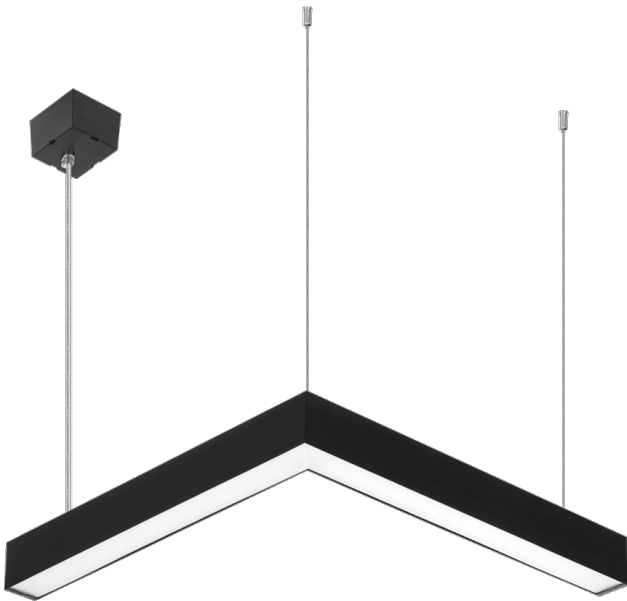

TECHNICAL PARAMETERS

Index:	320149
Ingress protection:	IP20
Impact resistance:	IK03
Rated power of the luminaire [W]*:	17
Luminous flux [lm]*:	2100
Colour temperature [K]:	4000
Material of the body:	aluminium
Colour of the body:	black
Diffuser material:	PC
Diffuser type:	PRM

CHARACTERISTICS

A suspended lighting lamp of classic proportions and modern design. The lamp body is made from anodised aluminium profile in grey or an aluminium profile painted in white or black (other colours available on request). The optical system in the form of a prismatic diffuser (PRM) or a dedicated, flexible opal shade evenly illuminates the lamp. The modularity and demountability of the lamp allow the replacement of electronic components such as the LED strip, power supply and the replacement of the diffuser by qualified persons. The lamp profile has been adapted to work with IoT smart modules, which will further optimise the level and amount of light it provides. The lamp is equipped with a unique pendant system for easy lamp installation and sling adjustment. All Baris 52 LED Single suspended luminaires include a 1.2m sling with box included and are fitted with a diffuser.

APPLICATION

The L-, X- and T-connectors of Baris 52 LED Single create extraordinary possibilities for configuring the light line to suit the character and shape of the room, making it possible to create virtually unlimited straight lines, figures and patterns.

BARIS 52 LED Z LAMPA L 2100LM 840 IP20 I CL. PRM BLACK 17W SINGLE

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Rated power of the luminaire [W]:	17	LED lifespan L90B10 [h]:	34000
Index:	320149	Diffuser material:	PC
Colour temperature [K]:	4000	Dimensions (H/W/T/S) [mm]:	575/575/52
Light source:	LED module	Material of the body:	aluminium
Luminous flux [lm]:	2100	Colour of the body:	black
Diffuser type:	PRM	Impact resistance:	IK03
Supply voltage [V]:	220 - 240	Ingress protection:	IP20
Frequency [Hz]:	50 - 60	Mounting version:	suspended
Luminous efficacy [lm/W]:	124	Product line:	L
Energy efficiency class:	D	Net weight [kg]:	1.960
Electrical protection class:	I	Warranty [years]:	5
Colour rendering index:	>80	CE certificate:	40/2025
SDCM:	≤ 3	Manual:	Download PDF
LED lifespan L70B50 [h]:	112000	Plik LDT:	Download
LED lifespan L80B20 [h]:	70 000		

Card creation date: 29 April 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 40/2025



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl