


# BARIS 52 LED Z LAMPA L 2100LM 840 IP20 I CL. PRM BLACK 17W SINGLE

DETAILED CARD

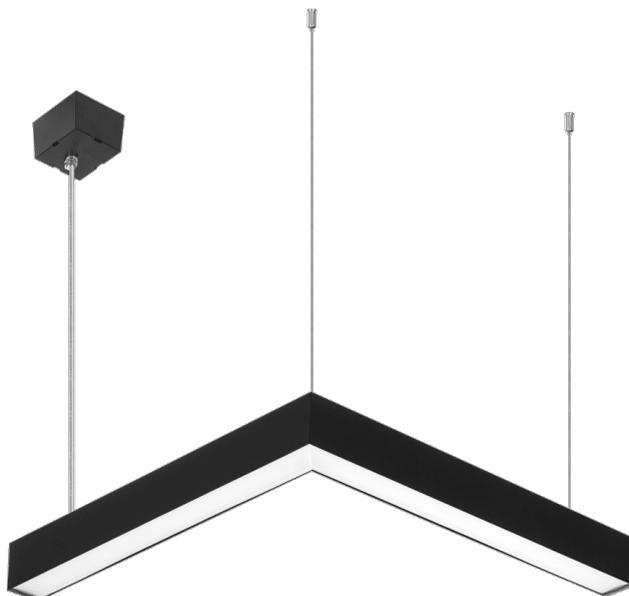

## TECHNICAL PARAMETERS

<b>Index:</b>	320149
<b>Ingress protection:</b>	IP20
<b>Impact resistance:</b>	IK03
<b>Rated power of the luminaire [W]*:</b>	17
<b>Luminous flux [lm]*:</b>	2100
<b>Colour temperature [K]:</b>	4000
<b>Material of the body:</b>	aluminium
<b>Colour of the body:</b>	black
<b>Diffuser material:</b>	PC
<b>Diffuser type:</b>	PRM

## CHARACTERISTICS

A suspended lighting lamp of classic proportions and modern design. The lamp body is made from anodised aluminium profile in grey or an aluminium profile painted in white or black (other colours available on request). The optical system in the form of a prismatic diffuser (PRM) or a dedicated, flexible opal shade evenly illuminates the lamp. The modularity and demountability of the lamp allow the replacement of electronic components such as the LED strip, power supply and the replacement of the diffuser by qualified persons. The lamp profile has been adapted to work with IoT smart modules, which will further optimise the level and amount of light it provides. The lamp is equipped with a unique pendant system for easy lamp installation and sling adjustment. All Baris 52 LED Single suspended luminaires include a 1.2m sling with box included and are fitted with a diffuser.

## APPLICATION

Baris 52 LED Single in the shape of an L, X, T create extraordinary lighting configurations to suit the character and shape of the room, making it possible to create different figures and patterns.

# BARIS 52 LED Z LAMPA L 2100LM 840 IP20 I CL. PRM BLACK 17W SINGLE

DETAILED CARD


## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	320149	<b>Diffuser type:</b>	PRM
<b>Light source:</b>	LED module	<b>Material of the body:</b>	aluminium
<b>Rated power of the luminaire [W]:</b>	17	<b>Colour of the body:</b>	black
<b>Luminous flux [lm]:</b>	2100	<b>Dimensions (H/W/T/S) [mm]:</b>	575/575/52
<b>Supply voltage [V]:</b>	220 - 240	<b>Impact resistance:</b>	IK03
<b>Frequency [Hz]:</b>	50 - 60	<b>Ingress protection:</b>	IP20
<b>Luminous efficacy [lm/W]:</b>	124	<b>Mounting version:</b>	suspended
<b>Energy efficiency class:</b>	D	<b>Net weight [kg]:</b>	1.960
<b>Electrical protection class:</b>	I	<b>Product line:</b>	L
<b>Colour temperature [K]:</b>	4000	<b>Category of application:</b>	office lighting
<b>Color rendering index (Ra) &gt;:</b>	80	<b>Warranty [years]:</b>	5
<b>SDCM:</b>	3	<b>CE certificate:</b>	<a href="#">40/2025</a>
<b>LED lifespan L70B50 [h]:</b>	112000	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>LED lifespan L80B10 [h]:</b>	70 000	<b>Environmental Product Declaration (EPD):</b>	<a href="#">852/2025</a>
<b>LED lifespan L90B10 [h]:</b>	34000	<b>ISO Certificates:</b>	9001:2015, 14001:2015, 45001:2018, 50001:2018
<b>Diffuser material:</b>	PC	<b>Plik LDT:</b>	<a href="#">Download</a>

# BARIS 52 LED Z LAMPA L 2100LM 840 IP20 I CL. PRM BLACK 17W SINGLE

DETAILED CARD

## TECHNICAL PICTURES

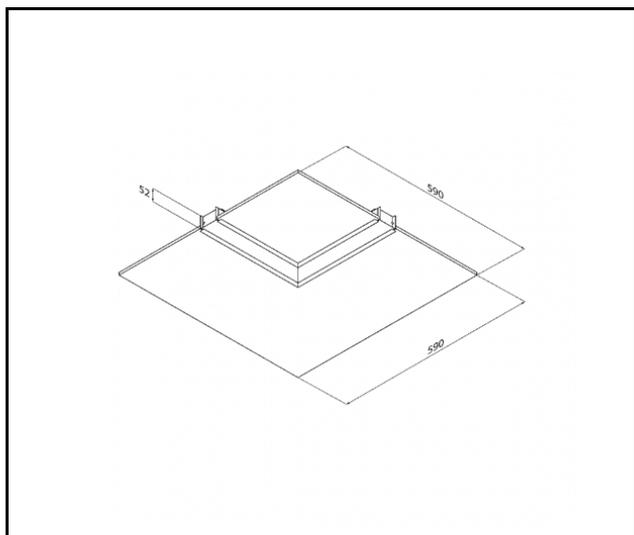

Card creation date: 16 December 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 40/2025