
TERRACO SIDE DIR/IND LED ALU 530LM PLX IP54 I CL. 840 17W GRAPHITE

DETAILED CARD

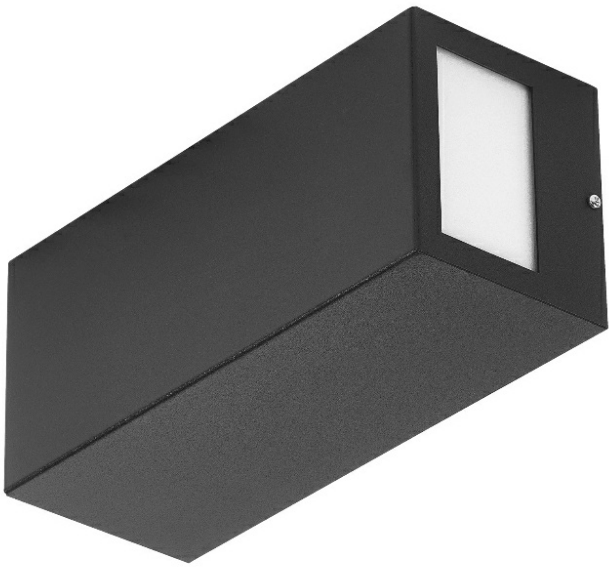

TECHNICAL PARAMETERS

Index:	774294
Light source:	LED module
Rated power of the luminaire [W]*:	17
Luminous flux [lm]*:	530
Energy efficiency class:	G
Electrical protection class:	I
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
Exchangeable source:	yes
Material of the body:	aluminium

CHARACTERISTICS

Terraco LED is a modernist luminaire distinguished by its interesting minimalist design. The powder-coated aluminium body of the lamp is available in four colour versions: grey, graphite, white and black. The multitude of versions with different luminous surfaces allows it to be used in a variety of places and in different ways: vertically and horizontally. Installed on a building façade, it can shine downwards, upwards and sideways. It has a high ingress protection rating of IP54. It is designed for surface mounting.

APPLICATION

The Terraco LED lamp will be particularly suitable as outdoor facade lighting, terrace lighting, and balcony lighting. Small dimensions increase the range of its applications - it can illuminate alcoves or hard-to-reach places. Terraco lamps can also be used in the interiors of buildings and arranged in a variety of ways on the wall to form interesting lighting arrangements. The lamp allows to realize a large number of interesting lighting concepts. It is used to illuminate contemporary architecture.

TERRACO SIDE DIR/IND LED ALU 530LM PLX IP54 I CL. 840 17W GRAPHITE


DETAILED CARD

TECHNICAL PARAMETERS TABLE


Index:	774294
EAN:	5905963774294
Light source:	LED module
Rated power of the luminaire [W]:	17
Luminous flux [lm]:	530
Frequency [Hz]:	50-60
Luminous efficacy [lm/W]:	32
Energy efficiency class:	G
Electrical protection class:	I
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
SDCM:	4
LED lifespan L70B50 [h]:	134000
LED lifespan L80B10 [h]:	86000
LED lifespan L90B10 [h]:	46000
Light distribution type:	SIDE DIR/IND
Optics:	general

Exchangeable source:	yes
Diffuser material:	PMMA
Diffuser type:	matt
Diffuser colour:	white
Material of the body:	aluminium
Colour of the body:	graphite RAL7024
Dimensions (H/W/T/S) [mm]:	260/110/100
Impact resistance:	IK04
Ingress protection:	IP54
Mounting version:	surface
Working temperature [°C]:	from -25 to +35
Supply voltage [V]:	220 - 240
Warranty [years]:	5
CE certificate:	90/2025
Manual:	Download PDF
Category of application:	architectural
Plik LDT:	Download

TECHNICAL DETAILS



Side Dir/Ind



Side Dir/Ind

Card creation date: 19 September 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 90/2025

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl