# LUNGO II 1280LM 20ST FI60 H170MM I CL. IP20 SUSPENDED BLACK AND GOLD 830 (12W)

DETAILED CARD



## TECHNICAL PARAMETERS

| | |
|---|---|
| **Index:** | 779572 |
| **Ingress protection:** | IP20 |
| **Rated power of the luminaire [W]*:** | 12 |
| **Luminous flux [lm]*:** | 1280 |
| **Colour temperature [K]:** | 3000 |
| **Color rendering index (Ra) >:** | 80 |
| **Electrical protection class:** | I |
| **Energy efficiency class:** | E |
| **Material of the body:** | aluminium |
| **Colour of the body:** | black |

## CHARACTERISTICS

**Lungo II LED** is a modern luminaire by the company, designed for functional and aesthetic lighting of commercial interiors, offices and traffic zones in public buildings. With its slim, geometric form and high quality workmanship, it fits perfectly into modern architectural spaces. **Advantages of the Lungo II LED luminaire:**- High light quality and high colour rendering index (Ra ≥ 80)- Modern, minimalist design suitable for offices, corridors, receptions and entrance areas- Can be surface-mounted or suspended

## APPLICATION

Lungo II LED luminaire is used in spaces such as:
- corridors and passageways in office and institutional buildings
- entrance areas and lobbies
- staircases
- reception areas

# LUNGO II 1280LM 20ST FI60 H170MM I CL. IP20 SUSPENDED BLACK AND GOLD 830 (12W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE


| | |
|---|---|
| **Index:** | 779572 |
| **EAN:** | 5905963779572 |
| **Category of application:** | office lighting |
| **Light source:** | LED |
| **Rated power of the luminaire [W]:** | 12 |
| **Supply voltage [V]:** | 230 |
| **Frequency [Hz]:** | 50-60 |
| **Luminous flux [lm]:** | 1280 |
| **Luminous efficacy [lm/W]:** | 90 |
| **Energy efficiency class:** | E |
| **Electrical protection class:** | I |
| **Colour temperature [K]:** | 3000 |
| **Color rendering index (Ra) >:** | 80 |
| **Beam angle [°]:** | 20 |
| **Light colour:** | ciepła biel |
| **Exchangeable source:** | yes |
| **Optics material:** | aluminium |
| **Optics:** | reflector |
| **Material of the body:** | aluminium |
| **Colour of the body:** | black |
| **Ring material:** | aluminium |

| | |
|---|---|
| **Ring colour:** | gold |
| **Dimensions (H/W/T/S) [mm]:** | fi=60 L=170 H=1500 |
| **Mounting dimensions [mm]:** | L=36mm fi6mm |
| **Ingress protection:** | IP20 |
| **Mounting version:** | suspended |
| **LED lifespan L90B10 [h]:** | 60000 |
| **Working temperature [°C]:** | from 0 to +35 |
| **Control:** | ON/OFF |
| **Wire type:** | red braid |
| **Cable length [m]:** | 1.50 |
| **Number on the palette [pcs]:** | 416 |
| **Dimensions of single box [mm]:** | fi=90mm L=335mm |
| **Net weight [kg]:** | 0.700 |
| **Gross weight [kg]:** | 0.900 |
| **Photobiological safety:** | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| **Warranty [years]:** | 5 |
| **CE certificate:** | 51/2025 |
| **Manual:** | Download PDF |
| **ISO Certificates:** | 9001:2015, 14001:2015, 45001:2018, 50001:2018 |
| **Plik LDT:** | Download |

# LUNGO II 1280LM 20ST FI60 H170MM I CL. IP20 SUSPENDED BLACK AND GOLD 830 (12W)

DETAILED CARD

**TECHNICAL PICTURES**

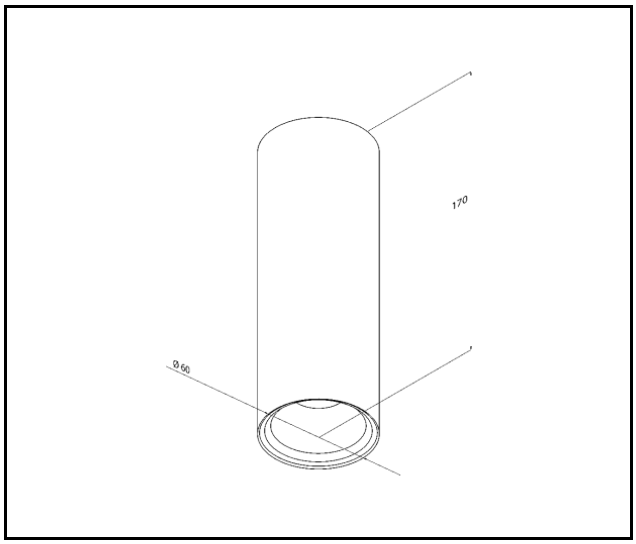


Card creation date: 25 September 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 51/2025

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl