LUNGO II 1120LM 40ST FI60 H170MM I CL. IP20 SUSPENDED BLACK AND GOLD 840 DALI (12W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	779947
Ingress protection:	IP20
Rated power of the luminaire [W]*:	12
Luminous flux [lm]*:	1120
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
Electrical protection class:	I
Energy efficiency class:	E
Material of the body:	aluminium
Colour of the body:	black

CHARACTERISTICS

Lungo II LED is a modern luminaire by the company, designed for functional and aesthetic lighting of commercial interiors, offices and traffic zones in public buildings. With its slim, geometric form and high quality workmanship, it fits perfectly into modern architectural spaces. **Advantages of the Lungo II LED luminaire:**- High light quality and high colour rendering index (Ra ≥ 80)- Modern, minimalist design suitable for offices, corridors, receptions and entrance areas- Can be surface-mounted or suspended

APPLICATION

Lungo II LED luminaire is used in spaces such as:
- corridors and passageways in office and institutional buildings
- entrance areas and lobbies
- staircases
- reception areas

LUNGO II 1120LM 40ST FI60 H170MM I CL. IP20 SUSPENDED BLACK AND GOLD 840 DALI (12W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE


Index:	779947
EAN:	5905963779947
Category of application:	office lighting
Light source:	LED
Rated power of the luminaire [W]:	12
Supply voltage [V]:	230
Frequency [Hz]:	50-60
Luminous flux [lm]:	1120
Luminous efficacy [lm/W]:	91
Energy efficiency class:	E
Electrical protection class:	I
Colour temperature [K]:	4000
Color rendering index (Ra) >:	80
Beam angle [°]:	40
Light colour:	neutralna biel
Exchangeable source:	yes
Optics material:	aluminium
Optics:	reflector
Material of the body:	aluminium
Colour of the body:	black
Ring material:	aluminium

Ring colour:	gold
Dimensions (H/W/T/S) [mm]:	fi=60 L=170 H=1500
Mounting dimensions [mm]:	L=40mm fi6mm
Ingress protection:	IP20
Mounting version:	suspended
LED lifespan L90B10 [h]:	60000
Working temperature [°C]:	from 0 to +35
DIMM DALI:	yes
Control:	yes
Wire type:	red braid
Cable length [m]:	1.50
Number on the palette [pcs]:	416
Dimensions of single box [mm]:	fi=90mm L=400mm
Net weight [kg]:	0.700
Gross weight [kg]:	0.900
Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Warranty [years]:	5
CE certificate:	51/2025
Manual:	Download PDF
ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018
Plik LDT:	Download

LUNGO II 1120LM 40ST FI60 H170MM I CL. IP20 SUSPENDED BLACK AND GOLD 840 DALI (12W)

DETAILED CARD

TECHNICAL PICTURES

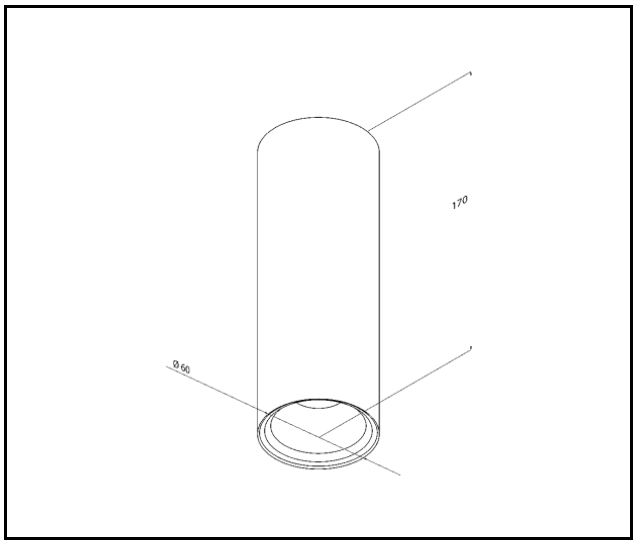

Card creation date: 25 September 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 51/2025

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl