


# CONTRA LED 1195X295MM 4500LM 840 IP40/20 II CL. PRM PS 31W DALI

DETAILED CARD

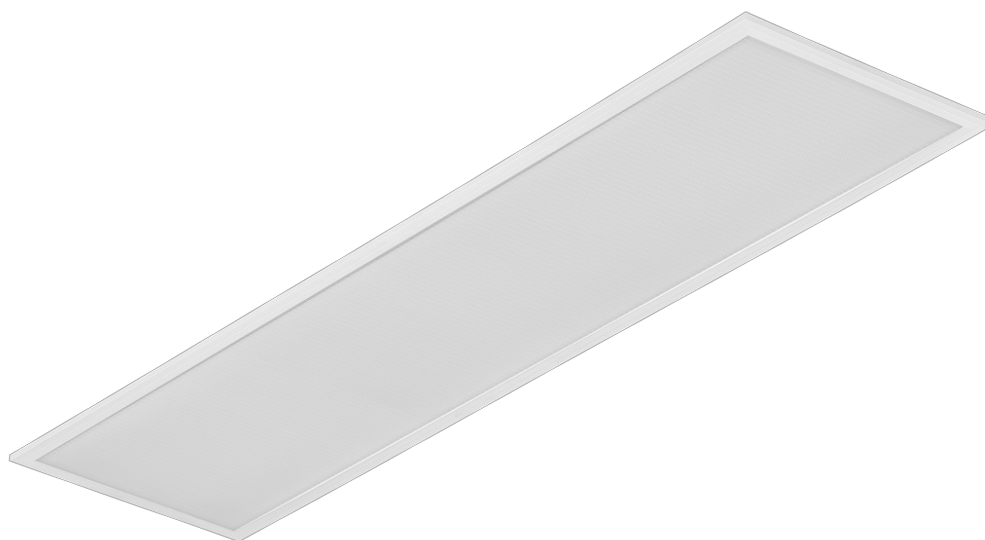

## TECHNICAL PARAMETERS

<b>Index:</b>	375972
<b>Ingress protection:</b>	IP40/IP20
<b>Impact resistance:</b>	IK06
<b>Rated power of the luminaire [W]*:</b>	31
<b>Luminous flux [lm]*:</b>	4500
<b>Colour temperature [K]:</b>	4000
<b>Color rendering index (Ra) &gt;:</b>	80
<b>Energy efficiency class:</b>	C
<b>Electrical protection class:</b>	II
<b>Material of the body:</b>	coated aluminium

## CHARACTERISTICS

Contra LED versatile LED panel characterised by its low, slim profile and elegant design. Adapted for flush-mounted installation in modular ceilings, surface-mounted or suspended using an additional frame (available as an accessory). Luminaire with integrated energy-saving LED module, made of white painted aluminium profile, equipped with structured multi-layer PS MAT or PRM shade for perfect light diffusion.

## APPLICATION

The luminaire is intended for indoor use in office (offices, conference rooms) or representative use (hotels, restaurants); illumination of public facilities, including hospitals, educational facilities, offices, halls, garages, passageways, warehouses, shops, as well as in the food industry and food-related retail and service facilities. The unique design and excellent light performance enable CONTRA LED to be used as the main source of light, also for work that requires visual focus. The lamp is suitable for both new applications and the replacement of traditional T8 and T5 luminaires with energy-efficient LED solutions.

# CONTRA LED 1195X295MM 4500LM 840 IP40/20 II CL. PRM PS 31W DALI

DETAILED CARD

## TECHNICAL PARAMETERS TABLE


<b>Index:</b>	375972	<b>Colour of the body:</b>	white
<b>EAN:</b>	5905963375972	<b>Dimensions (H/W/T/S) [mm]:</b>	1195/295/30
<b>Light source:</b>	LED	<b>Impact resistance:</b>	IK06
<b>Rated power of the luminaire [W]:</b>	31	<b>Ingress protection:</b>	IP40/IP20
<b>Supply voltage [V]:</b>	220-240	<b>Mounting version:</b>	podtynkowy, natynkowy, zwieszany
<b>Frequency [Hz]:</b>	50-60	<b>Working temperature [°C]:</b>	from 0 to +35
<b>Luminous flux [lm]:</b>	4500	<b>UGR (4H8H):</b>	<19
<b>Luminous efficacy [lm/W]:</b>	145	<b>DIMM DALI:</b>	yes
<b>Energy efficiency class:</b>	C	<b>Number on the palette [pcs]:</b>	50
<b>Electrical protection class:</b>	II	<b>Net weight [kg]:</b>	1.200
<b>Colour temperature [K]:</b>	4000	<b>Category type:</b>	troffers
<b>Color rendering index (Ra) &gt;:</b>	80	<b>LED lifespan L70B50 [h]:</b>	228000
<b>SDCM:</b>	2	<b>LED lifespan L80B10 [h]:</b>	143000
<b>Beam angle [°]:</b>	115	<b>LED lifespan L90B10 [h]:</b>	68000
<b>Surge protection [kV]:</b>	2	<b>Power factor:</b>	0.90
<b>Diffuser material:</b>	PS	<b>Additional accessories:</b>	ramka natynkowa, system zwieszania
<b>Diffuser type:</b>	PRM	<b>Warranty [years]:</b>	5
<b>Diffuser colour:</b>	transparent	<b>CE certificate:</b>	<a href="#">26/2025</a>
<b>Optics material:</b>	PMMA	<b>PZH certificate:</b>	<a href="#">B-BK-60112-0081/2024</a>
<b>Optics:</b>	lens	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>Material of the body:</b>	coated aluminium	<b>Plik LDT:</b>	<a href="#">Download</a>

# CONTRA LED 1195X295MM 4500LM 840 IP40/20 II CL. PRM PS 31W DALI


DETAILED CARD

## ACCESSORIES AVAILABLE


index	Name
999543	Plasterboard recessing kit 630x630 white (steel version)
374715	CONTRA LED surface-mounted frame CLICK 600x600x65mm
374708	CONTRA LED surface-mounted frame CLICK 1200x300x65mm
374692	CONTRA LED suspension system 1200x300
374685	CONTRA LED suspension system 600x600
374838	CONTRA LED MOUNTING CLIPS IN KG (4PCS)
374845	Frame adapter KG 635x635 WHITE
374852	Frame adapter KG 1235x335 WHITE
998966	Frame steel white structure RAL9016 600x600 SM "well effect"
374722	CONTRA LED suspension system 600x600 DALI
374739	CONTRA LED - suspension system 1200x300 DALI
761294	Emergency module 2W/10-50V Li-ION EMG-A-Li-2L 3h 3.6V 2.5Ah AT - CONTRA (GKO)



Plasterboard recessing kit 630x630 white (steel version) (999543)

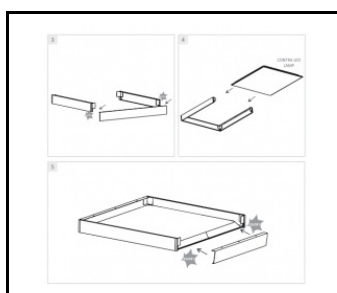

CONTRA LED surface-mounted frame CLICK 600x600x65mm (374715)




CONTRA LED surface-mounted frame CLICK 1200x300x65mm (374708)



CONTRA LED suspension system 1200x300 (374692)



CONTRA LED suspension system 600x600 (374685)



Frame steel white structure RAL9016 600x600 SM "well effect" (998966)

Card creation date: 04 December 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 26/2025



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl