# QUEST LED EVO M 12950LM I CL. IP67 740 120D 71W

DETAILED CARD




## TECHNICAL PARAMETERS

| | |
|---|---|
| **Index:** | 834653 |
| **Ingress protection:** | IP67 |
| **Luminous flux [lm]*:** | 12950 |
| **Colour temperature [K]:** | 4000 |
| **Color rendering index (Ra) >:** | 70 |
| **SDCM:** | 3 |
| **Electrical protection class:** | I |
| **Energy efficiency class:** | A |
| **Material of the body:** | aluminium |
| **Colour of the body:** | RAL7016 |

## CHARACTERISTICS

Quest LED EVO M, their high-bay versions: surface-mounted Quest LED EVO M HB NT and suspended Quest LED EVO M HB Z are extremely efficient floodlights and premium HB class luminaires, manufactured in Poland. Their body is made of die-cast aluminium, powder coated, without an external heat sink and ribs that make it difficult to keep clean. The diffuser is made of tempered glass, under which there are LEDs with the highest efficiency. Different types of optics, especially asymmetrical ones, provide great freedom in choosing the right solution for a specific application. Thanks to the highest tightness rating on the market (IP67) and maximum impact resistance (IK10), the floodlights will perform well in all conditions, regardless of the weather and installation location. The new version of the renowned and proven QUEST model offers even better lighting parameters, achieving an efficiency of over 170 lm/W. Quest LED EVO M meets the requirements of PN-EN 60598-2 part 5, which allows it to be classified as an illumination projector, enabling complete freedom of installation in any position, with 360° rotation and resistance to strong winds. An additional advantage for contractors is the sealed quick connector – an innovative solution that eliminates traditional, time-consuming connection methods. Thanks to an intuitive system of coloured latches, connector installation is simple, quick and tool-free. The HB NT version is designed for surface mounting as a highbay using dedicated brackets. The HB Z version is designed for suspension. The accessory kit includes brackets for pole mounting, a frame for flush mounting (e.g. shelters), light pollution reduction screens and protective grids in two colours with different degrees of light reduction (white RAL7016: 4%, body colour RAL7016: 8%). The models can be equipped with an external motion and twilight sensor. They are also available in the ENDURA version, resistant to elevated ambient temperatures up to 50°C. The range also includes dual-module versions with increased flux and power. DALI versions are available (in the case of a gap in a specific power rating in the range with a DALI power supply, check the ENDURA DALI versions). In addition, a version designed for RGB+W illumination is available.

## APPLICATION

Quest LED EVO M is widely used in lighting educational, administrative and recreational facilities, halls, garages, passageways, warehouses, shops, as well as in the food industry and commercial and service facilities related to food products. They are an ideal solution for illuminating buildings, small sports fields, open spaces and car parks. They can be mounted as floodlights on poles and masts, on building facades, as well as surface-mounted highbays (HB NT version) and suspended highbays (HB Z version). Thanks to the flush-mounted option, they are perfect for shelters. Quest LED EVO M is an excellent choice for factories, production halls and large warehouses.

# QUEST LED EVO M 12950LM I CL. IP67 740 120D 71W

DETAILED CARD

## TECHNICAL PARAMETERS TABLE


| | |
|---|---|
| **Index:** | 834653 |
| **EAN:** | 5905963834653 |
| **Light source:** | LED |
| **Rated power of the luminaire [W]:** | 71 |
| **Supply voltage [V]:** | 220 - 240 |
| **Surge protection [kV]:** | 6 |
| **Frequency [Hz]:** | 50-60 |
| **Luminous flux [lm]:** | 12950 |
| **Luminous efficacy [lm/W]:** | 182 |
| **Energy efficiency class:** | A |
| **Electrical protection class:** | I |
| **Colour temperature [K]:** | 4000 |
| **Color rendering index (Ra) >:** | 70 |
| **SDCM:** | 3 |
| **Beam angle [°]:** | 120 |
| **Diffuser material:** | glass |
| **Diffuser type:** | transparent |
| **Material of the body:** | aluminium |
| **Colour of the body:** | RAL7016 |
| **Light distribution type:** | general |
| **Dimensions (H/W/T/S) [mm]:** | 383/550/57 |
| **Mounting dimensions [mm]:** | 400 |
| **Ingress protection:** | IP67 |

| | |
|---|---|
| **Impact resistance:** | IK10 |
| **Mounting version:** | surface |
| **Working temperature [°C]:** | from -20 to +35 |
| **The number of implement units:** | 1 |
| **Number on the palette [pcs]:** | 48 |
| **Net weight [kg]:** | 8 |
| **Category type:** | floodlights |
| **AC voltage range [V]:** | 198-264 |
| **DC voltage range [V]:** | 176-280 |
| **Version:** | floodlight |
| **LED lifespan L70B50 [h]:** | 162000 |
| **LED lifespan L80B10 [h]:** | 101000 |
| **LED lifespan L90B10 [h]:** | 47000 |
| **Category of application:** | industrial |
| **Warranty [years]:** | 5 |
| **CE certificate:** | 75/2025 |
| **ENEC Certificate:** | 0487/ENEC/26 |
| **HACCP:** | 852/2004 |
| **Environmental Product Declaration (EPD):** | 816/2025 |
| **Manual:** | Download PDF |
| **ISO Certificates:** | 9001:2015, 14001:2015, 45001:2018, 50001:2018 |
| **Plik LDT:** | Download |

# QUEST LED EVO M 12950LM I CL. IP67 740 120D 71W

DETAILED CARD

## TECHNICAL PICTURES

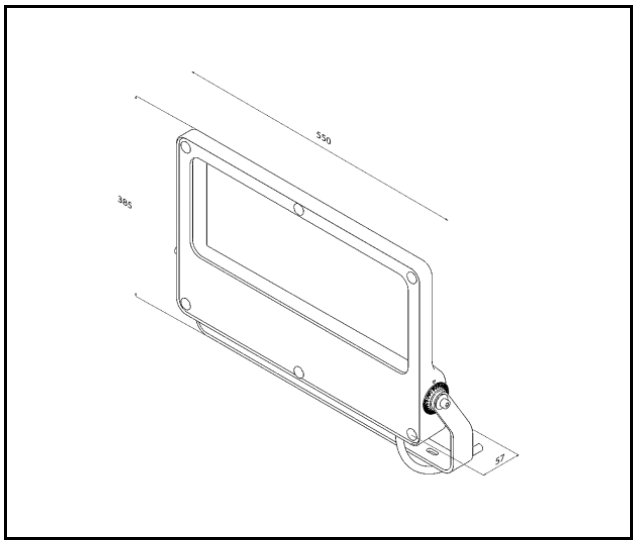


# QUEST LED EVO M 12950LM I CL. IP67 740 120D 71W


DETAILED CARD

## ACCESSORIES AVAILABLE


| index | Name |
|---|---|
| 840463 | Quest LED Evo M recessed frame RAL7016 |
| 840432 | QUEST LED EVO M protective grid RAL7016 |
| 840494 | QUEST LED EVO M cover RAL7016 |
| 840074 | QUEST LED EVO M protective grid RAL9003 |
| 840401 | QUEST LED EVO S/M/L pole holder 1x |
| 840418 | QUEST LED EVO S/M/L pole holder 2x |
| 840098 | QUEST LED EVO XS/S/M/L wall mount MAX RAL7016 1m |
| 840388 | QUEST LED EVO S/M/L RCR set 1x |




Quest LED Evo M recessed frame RAL7016 (840463)




QUEST LED EVO M protective grid RAL7016 (840432)




QUEST LED EVO M cover RAL7016 (840494)




QUEST LED EVO M protective grid RAL9003 (840074)




QUEST LED EVO S/M/L pole holder 1x (840401)



QUEST LED EVO S/M/L pole holder 2x (840418)



QUEST LED EVO XS/S/M/L wall mount MAX RAL7016 1m (840098)



QUEST LED EVO S/M/L RCR set 1x (840388)



The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 75/2025

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl