

# CONSTELIA LED 3200LM 740 RM7 IP66 II CL. DALI SP10KV IK09 (24W)

DETAILED CARD



## TECHNICAL PARAMETERS

Index:	809125
Ingress protection:	IP66
Impact resistance:	IK09
Rated power of the luminaire [W]*:	24
Luminous flux [lm]*:	3200
Colour temperature [K]:	4000
Colour rendering index:	>70
Optics:	RM7
Control:	Yes + 5-stage power reduction

## CHARACTERISTICS

Constelia LED is a new generation of stylised LED park-and-ride luminaires. It uses directional multi-lens matrices, made of PMMA, with each lens having dedicated optics, ensuring the light characteristics remain consistent over time. The luminaire's design ensures that the luminaire's internal chamber remains sealed. As standard, the luminaire offers tool-free access to the electrical equipment, which, if desired and to protect against vandalism or uncontrolled opening, can optionally be permanently secured with screws. The luminaire offers rapid and convenient serviceability, allowing one integrated component to be replaced without the need to dismantle the entire luminaire and make soldered or screwed connections. No on-site service work is required. Simply replace the module with a spare (accessory) close the luminaire and the service work is then carried out on site: at the luminaire owner's facility or sent back to the manufacturer's service centre. The luminaire body and handle are made of die-cast aluminium, powder-coated black and have a very high IP66 ingress protection and IK09 mechanical shock resistance.

Accessories available: NTC overheating protection; fully programmable DALI driver; luminaire CLO and Autonomous 5-step power reduction functions available; connection terminals;

tool-free access protected by a knife disconnect switch to de-energise the integral module if the compartment is opened.

Additional options: stylised glazing to transform the external appearance of the luminaire, ZHAGA connector (ZhagaBook 18); interfacing with control systems, anti-vandal protection with screws; additional SP10kV protection outside the power supply, on/off power supply without power reduction; design with cable terminated with quick connector; painting in any RAL colour. Certifications: CE, RoHS, ENEC, ENEC+, Zhaga-D4i.

## APPLICATION

Outdoor areas of places such as town halls, libraries, town halls, health facilities, schools, kindergartens, public gardens, streets, pavements, recreational areas: playing fields, playgrounds, cycle paths, historical sites, old towns.


# CONSTELIA LED 3200LM 740 RM7 IP66 II CL. DALI SP10KV IK09 (24W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	809125	Colour of the body:	black
EAN:	5905963809125	Dimensions (H/W/T/S) [mm]:	425/425/827
Category type:	Park and city lighting	Mounting dimensions [mm]:	ø76
Category of application:	parkings and bicycle paths	Impact resistance:	IK09
Light source:	LED module	Ingress protection:	IP66
Rated power of the luminaire [W]:	24	Mounting version:	top
Luminous flux [lm]:	3200	Working temperature [°C]:	from -40 to +50
Supply voltage [V]:	220-240	DIMM DALI:	yes
Luminous efficacy [lm/W]:	133	Control:	Yes + 5-stage power reduction
Energy efficiency class:	D	Wire type:	HO7 RNF-2x1
Electrical protection class:	II	Cable length [m]:	1.50
Colour temperature [K]:	4000	Protection type:	NTC + ESD + SP10kV/10kA
Colour rendering index:	>70	Number on the palette [pcs]:	8
SDCM:	≤ 4	Net weight [kg]:	7
Power factor:	0.97	ETIM class:	EC000062
Surge protection [kV]:	10	Photobiological safety:	RG0 - exempt (no photobiological hazard)
Diffuser material:	toughened glass	Warranty [years]:	5 z możliwością przedłużenia do 10
Diffuser type:	transparent	CE certificate:	<a href="#">87/2025</a>
Optics:	RM7	ENEC Certificate:	<a href="#">0431/ENEC/25; 0151/ENEC+/25</a>
Optics material:	PMMA + PC	Zhaga-D4i:	<a href="#">ZG448511062025</a>
Material of the body:	powder coated aluminium	Manual:	<a href="#">Download PDF</a>

## LIGHT CURVES

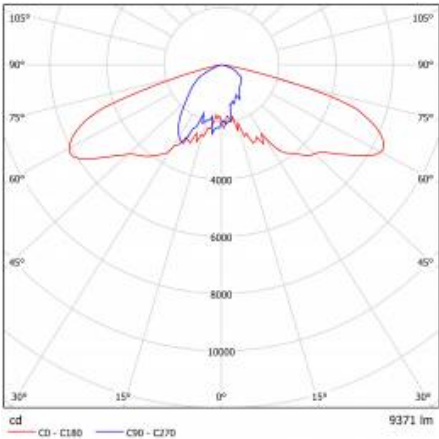

Card creation date: 09 July 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 87/2025



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)