# PROXIMA LED 1700LM 3000K IP65 II CL. OPAL WHITE 16W

DETAILED CARD



## TECHNICAL PARAMETERS

| | |
|---|---|
| **Index:** | 103988 |
| **Ingress protection:** | IP65/54 |
| **Impact resistance:** | IK10 |
| **Rated power of the luminaire [W]*:** | 16 |
| **Luminous flux [lm]*:** | 1700 |
| **Colour temperature [K]:** | 3000 |
| **Energy efficiency class:** | E |
| **Material of the body:** | PP |
| **Diffuser material:** | PC |
| **Diffuser type:** | OPAL |

## CHARACTERISTICS

Surface-mounted, round LED light fixture, high ingress protection class IP65 and an integrated energy-saving light source LED. Base and ring made of UV-resistant plastic. Specially formed diffuser made of impact-resistant PC ensures the highest impact resistance of the fitting (IK10). Optional equipment: radio motion sensor (RCR).

## APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for outdoor (façade lighting) or indoor use (rooms with high humidity, passageways). Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms. The luminaire will also work well as a general light source due to the decorative effect that it provides (indirect light distribution on the mounting surface). Two ring colors available: white or silver.

# PROXIMA LED 1700LM 3000K IP65 II CL. OPAL WHITE 16W


DETAILED CARD

## TECHNICAL PARAMETERS TABLE

| | |
|---|---|
| **Index:** | 103988 |
| **EAN:** | 5905963103988 |
| **Light source:** | LED module |
| **Rated power of the luminaire [W]:** | 16 |
| **Supply voltage [V]:** | 220 - 240 |
| **Frequency [Hz]:** | 50-60 |
| **Luminous flux [lm]:** | 1700 |
| **Luminous efficacy [lm/W]:** | 106 |
| **Energy efficiency class:** | E |
| **Electrical protection class:** | II |
| **Colour temperature [K]:** | 3000 |
| **Color rendering index (Ra) >:** | 80 |
| **Power factor:** | 0.90 |
| **Beam angle [°]:** | 120 |
| **Diffuser material:** | PC |
| **Diffuser type:** | OPAL |
| **Material of the body:** | PP |
| **Colour of the body:** | white |
| **Ring colour:** | white |
| **Dimensions (H/W/T/S) [mm]:** | ø390/110 |
| **Impact resistance:** | IK10 |

| | |
|---|---|
| **Ingress protection:** | IP65/54 |
| **Mounting version:** | surface |
| **Working temperature [°C]:** | from -20 to +35 |
| **Number on the palette [pcs]:** | 60 |
| **Net weight [kg]:** | 1.300 |
| **Category type:** | bulkheads |
| **LED lifespan L70B50 [h]:** | 118000 |
| **LED lifespan L80B10 [h]:** | 75000 |
| **LED lifespan L90B10 [h]:** | 36000 |
| **SDCM:** | 3 |
| **Ring material:** | ABS |
| **Mounting dimensions [mm]:** | 165/165 |
| **Dimensions of single box [mm]:** | 100/390/390 |
| **AC voltage range [V]:** | 198 - 264 |
| **DC voltage range [V]:** | 176-276 |
| **Warranty [years]:** | 5 |
| **CE certificate:** | 92/2025 |
| **Manual:** | Download PDF |
| **ISO Certificates:** | 9001:2015, 14001:2015, 45001:2018, 50001:2018 |
| **Plik LDT:** | Download |

## LIGHT CURVES

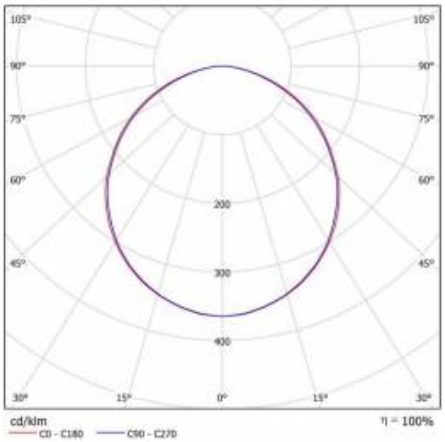


Card creation date: 21 July 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 92/2025

LENA LIGHTING
Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl