

# PROXIMA LED 2400LM 4000K IP65 II CL. RCR OPAL WHITE 22W (H)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	103841
<b>Ingress protection:</b>	IP65/54
<b>Impact resistance:</b>	IK10
<b>Rated power of the luminaire [W]*:</b>	22
<b>Luminous flux [lm]*:</b>	2400
<b>Colour temperature [K]:</b>	4000
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	PP
<b>Diffuser material:</b>	PC
<b>Diffuser type:</b>	OPAL

## CHARACTERISTICS

Surface-mounted, round LED light fixture, high ingress protection class IP65 and an integrated energy-saving light source LED. Base and ring made of UV-resistant plastic. Specially formed diffuser made of impact-resistant PC ensures the highest impact resistance of the fitting (IK10). Optional equipment: radio motion sensor (RCR).

## APPLICATION

Luminaire suited for surface mounting on ceilings or walls, intended for outdoor (façade lighting) or indoor use (rooms with high humidity, passageways). Available option with a radio motion sensor (RCR) – particularly well suited for passageways and usable rooms. The luminaire will also work well as a general light source due to the decorative effect that it provides (indirect light distribution on the mounting surface). Two ring colors available: white or silver.


# PROXIMA LED 2400LM 4000K IP65 II CL. RCR OPAL WHITE 22W (H)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Index:	103841	Ingress protection:	IP65/54
EAN:	5905963103841	Mounting version:	surface
Light source:	LED module	Working temperature [°C]:	from -20 to +35
Rated power of the luminaire [W]:	22	Motion sensor:	yes
Supply voltage [V]:	220 - 240	Number on the palette [pcs]:	60
Frequency [Hz]:	50-60	Net weight [kg]:	1.300
Luminous flux [lm]:	2400	Category type:	bulkheads
Luminous efficacy [lm/W]:	109	LED lifespan L70B50 [h]:	118000
Energy efficiency class:	E	LED lifespan L80B10 [h]:	75000
Electrical protection class:	II	LED lifespan L90B10 [h]:	36000
Colour temperature [K]:	4000	SDCM:	3
Color rendering index (Ra) >:	80	Ring material:	ABS
Power factor:	0.90	Mounting dimensions [mm]:	165/165
Beam angle [°]:	120	Dimensions of single box [mm]:	100/390/390
Diffuser material:	PC	AC voltage range [V]:	198 - 264
Diffuser type:	OPAL	DC voltage range [V]:	176-276
Material of the body:	PP	Warranty [years]:	5
Colour of the body:	white	CE certificate:	<a href="#">92/2025</a>
Ring colour:	white	Manual:	<a href="#">Download PDF</a>
Dimensions (H/W/T/S) [mm]:	ø390/110	Pliik LDT:	<a href="#">Download</a>
Impact resistance:	IK10		

## LIGHT CURVES

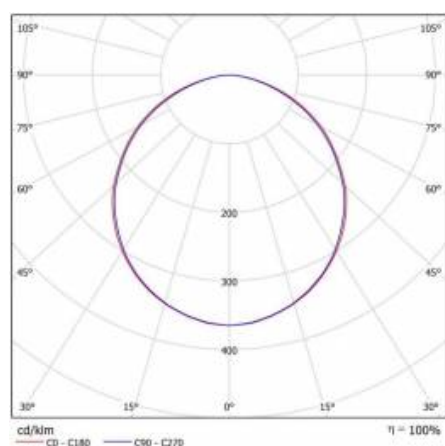

Card creation date: 21 July 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 92/2025



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)