

# INDUSTRY SLIM LED 590MM 3900LM 840 IP66 DAN (27W)

DETAILED CARD



# INDUSTRY SLIM LED 590MM 3900LM 840 IP66 DAN (27W)

DETAILED CARD

## TECHNICAL PARAMETERS

---

<b>Index:</b>	827112
<b>Ingress protection:</b>	IP66
<b>Impact resistance:</b>	IK09
<b>Rated power of the luminaire [W]*:</b>	27
<b>Luminous flux [lm]*:</b>	3900
<b>Colour temperature [K]:</b>	4000
<b>Material of the body:</b>	aluminium
<b>Colour of the body:</b>	grey
<b>Diffuser material:</b>	PC
<b>Diffuser type:</b>	matrix led

## CHARACTERISTICS

---

Industry Slim Led - a brand new industrial luminaire is characterized by high luminous flux and very high luminous efficiency >160 lm/W, which makes this luminaire highly energy-efficient and environmentally friendly. It is distinguished by its very high IP66 tightness. It owes this tightness to its well-thought-out design. The polycarbonate diffuser is permanently attached to the housing with a durable silicone gasket. This means that in addition to the tightness thus achieved, the light module is protected from uncontrolled interference and access to the LEDs. The tightness of the lamp, is ensured by the gland, which screwed tightens the gasket and prevents the penetration of dust or moisture and water. Industry Slim Led allows for pendant or surface mounting.

## APPLICATION

---

The luminaire is designed to illuminate industrial and warehouse facilities, due to its minimal dimensions, also in hard-to-reach places. The Industry Slim Led luminaire is available in various versions: with different optics, wide, narrow, and dedicated to high-bay light distribution, and five types of the diffuser, including an anti-glare diffuser.

## DETAILS

---




# INDUSTRY SLIM LED 590MM 3900LM 840 IP66 DAN (27W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

<b>Index:</b>	827112	<b>Diffuser type:</b>	matrix led
<b>EAN:</b>	5905963827112	<b>Material of the body:</b>	aluminium
<b>Light source:</b>	LED	<b>Colour of the body:</b>	grey
<b>Rated power of the luminaire [W]:</b>	27	<b>Dimensions (H/W/T/S) [mm]:</b>	590/50/75
<b>Luminous flux [lm]:</b>	3900	<b>Impact resistance:</b>	IK09
<b>Supply voltage [V]:</b>	220-240	<b>Ingress protection:</b>	IP66
<b>Frequency [Hz]:</b>	50-60	<b>Mounting version:</b>	surface, suspended
<b>Luminous efficacy [lm/W]:</b>	154	<b>Working temperature [°C]:</b>	from -20 to +35
<b>Energy efficiency class:</b>	C	<b>Net weight [kg]:</b>	0.920
<b>Electrical protection class:</b>	I	<b>Light distribution type:</b>	DAN
<b>Colour temperature [K]:</b>	4000	<b>Warranty [years]:</b>	5
<b>Color rendering index (Ra) &gt;:</b>	80	<b>CE certificate:</b>	<a href="#">100/2025</a>
<b>LED lifespan L70B50 [h]:</b>	150000	<b>ENEC Certificate:</b>	
<b>LED lifespan L80B10 [h]:</b>	100000	<b>Manual:</b>	<a href="#">Download PDF</a>
<b>LED lifespan L90B10 [h]:</b>	45000	<b>Environmental Product Declaration (EPD):</b>	<a href="#">852/2025</a>
<b>Beam angle [°]:</b>	butterfly	<b>ISO Certificates:</b>	9001:2015, 14001:2015, 45001:2018, 50001:2018
<b>Surge protection [kV]:</b>	2	<b>Pliik LDT:</b>	<a href="#">Download</a>
<b>Diffuser material:</b>	PC		

## LIGHT CURVES

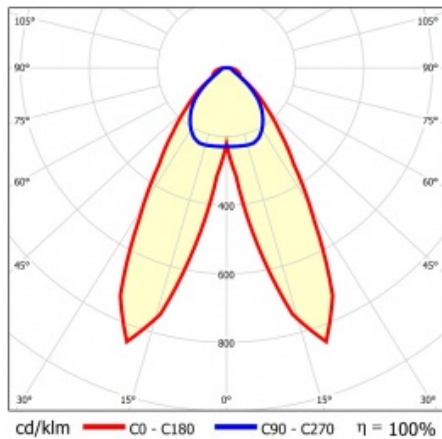

# INDUSTRY SLIM LED 590MM 3900LM 840 IP66 DAN (27W)

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
908200	TYTAN LED. ATLAS LED. INDUSTRY LED - adjustable handle (set of 2)
60000006	M16 stuffing box plug various PA black M-16 - BPM-21



TYTAN LED. ATLAS LED. INDUSTRY LED - adjustable handle (set of 2) (908200)



M16 stuffing box plug various PA black M-16 - BPM-21 (60000006)

Card creation date: 18 August 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 100/2025