

# POINT LED 8W SZKŁO OPAL 3000K

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	225116
<b>Ingress protection:</b>	IP44
<b>Impact resistance:</b>	IK07
<b>Nominal power [W]:</b>	8
<b>Luminous flux [lm]*:</b>	770
<b>Colour temperature [K]:</b>	3000
<b>SDCM:</b>	≤ 3
<b>Energy efficiency class:</b>	E
<b>Material of the body:</b>	PP
<b>Diffuser material:</b>	glass

## CHARACTERISTICS

Surface mounted, round LED light fixture with a high luminous flux, ingress protection class IP44 and an integrated energy-saving light source LED GO!. White base made of polypropylene; opal or prismatic glass diffuser. Available with a radio motion sensor (RCR). Color temperature 3000K/4000K, CRI>80, lifespan of LED 50 000h (L70B50) ta= 25 °C.

## APPLICATION

surface mounted luminaire for mounting on ceilings and walls; intended both for indoor (maintenance rooms, passageways) and outdoor use (façade lighting). The version with a radio motion sensor (RCR) is particularly well-suited to be used as a light source for public rooms and buildings (civic buildings, apartment buildings).


# POINT LED 8W SZKŁO OPAL 3000K

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Colour of the body:	white
Nominal power [W]:	8	Dimensions (H/W/T/S) [mm]:	ø230/90
Rated power of the luminaire [W]:	8	Impact resistance:	IK07
Supply voltage [V]:	220-240	Ingress protection:	IP44
Frequency [Hz]:	50 - 60	Mounting version:	surface
Luminous flux [lm]:	770	Working temperature [°C]:	from -20 to +35
Luminous efficacy [lm/W]:	96	Net weight [kg]:	1
Energy efficiency class:	E	Warranty [years]:	5
Electrical protection class:	I	CE certificate:	<a href="#">403/2023</a>
Colour temperature [K]:	3000	Index:	225116
Colour rendering index:	>80	EAN:	5905963225116
SDCM:	≤ 3	Category type:	bulkheads
LED lifespan L70B50 [h]:	50000	ETIM class:	EC002892
Beam angle [°]:	120	Category of application:	parkings and bicycle paths
Diffuser material:	glass	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser type:	OPAL	Manual:	<a href="#">Download PDF</a>
Material of the body:	PP		

## LIGHT CURVES

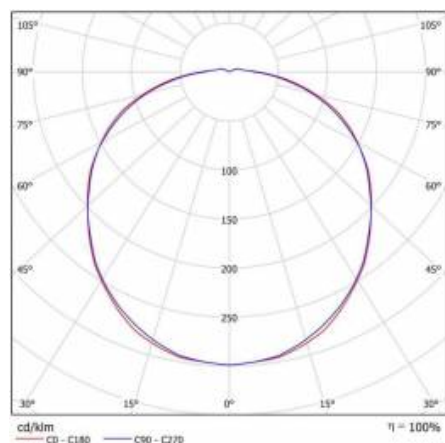

Card creation date: 06 December 2018

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 403/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: [hello@lenalighting.pl](mailto:hello@lenalighting.pl), [www.lenalighting.pl](http://www.lenalighting.pl)