

POINT LED RCR 8W SZKŁO OPAL 3000K

DETAILED CARD



TECHNICAL PARAMETERS

Index:	225246
Ingress protection:	IP44
Impact resistance:	IK07
Nominal power [W]:	8
Luminous flux [lm]*:	770
Colour temperature [K]:	3000
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	PP
Diffuser material:	glass

CHARACTERISTICS

Surface mounted, round LED light fixture with a high luminous flux, ingress protection class IP44 and an integrated energy-saving light source LED GO!. White base made of polypropylene; opal or prismatic glass diffuser. Available with a radio motion sensor (RCR). Color temperature 3000K/4000K, CRI>80, lifespan of LED 50 000h (L70B50) ta= 25 °C.

APPLICATION

surface mounted luminaire for mounting on ceilings and walls; intended both for indoor (maintenance rooms, passageways) and outdoor use (façade lighting). The version with a radio motion sensor (RCR) is particularly well-suited to be used as a light source for public rooms and buildings (civic buildings, apartment buildings).


POINT LED RCR 8W SZKŁO OPAL 3000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	8	Colour of the body:	white
Light source:	LED module	Dimensions (H/W/T/S) [mm]:	ø230/90
Colour temperature [K]:	3000	Impact resistance:	IK07
Luminous flux [lm]:	770	Ingress protection:	IP44
Rated power of the luminaire [W]:	8	Mounting version:	surface
Supply voltage [V]:	220-240	Working temperature [°C]:	from -20 to +35
Diffuser type:	OPAL	Net weight [kg]:	1.700
Frequency [Hz]:	50 - 60	Warranty [years]:	5
Motion sensor:	yes	Index:	225246
Energy efficiency class:	E	CE certificate:	403/2023
Luminous efficacy [lm/W]:	96	EAN:	5905963225246
Electrical protection class:	I	Category type:	bulkheads
Colour rendering index:	>80	ETIM class:	EC002892
SDCM:	≤ 3	Category of application:	parkings and bicycle paths
LED lifespan L70B50 [h]:	50000	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Beam angle [°]:	120	Manual:	Download PDF
Diffuser material:	glass	Plik LDT:	Download
Material of the body:	PP		

LIGHT CURVES

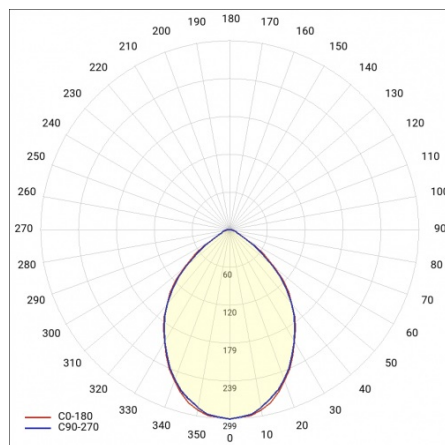

Card creation date: 10 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 403/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl