POINT LED RCR 8W SZKŁO OPAL 4000K

DETAILED CARD



TECHNICAL PARAMETERS

Index:	225253
Ingress protection:	IP44
Impact resistance:	IK07
Nominal power [W]:	8
Luminous flux [lm]*:	810
Colour temperature [K]:	4000
SDCM:	3
Energy efficiency class:	E
Material of the body:	PP
Diffuser material:	glass

CHARACTERISTICS

Surface mounted, round LED light fixture with a high luminous flux, ingress protection class IP44 and an integrated energy-saving light source LED GO!. White base made of polypropylene; opal or prismatic glass diffuser. Available with a radio motion sensor (RCR). Color temperature 3000K/4000K, CRI>80, lifespan of LED 50 000h (L70B50) ta= 25 °C.

APPLICATION

surface mounted luminaire for mounting on ceilings and walls; intended both for indoor (maintenance rooms, passageways) and outdoor use (façade lighting). The version with a radio motion sensor (RCR) is particularly well-suited to be used as a light source for public rooms and buildings (civic buildings, apartment buildings).


POINT LED RCR 8W SZKŁO OPAL 4000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Light source:	LED module	**Dimensions (H/W/T/S) [mm]:**	ø230/90
Nominal power [W]:	8	**Impact resistance:**	IK07
Rated power of the luminaire [W]:	8	**Ingress protection:**	IP44
Supply voltage [V]:	220-240	**Mounting version:**	surface
Frequency [Hz]:	50 - 60	**Working temperature [°C]:**	from -20 to +35
Luminous flux [lm]:	810	**Motion sensor:**	yes
Luminous efficacy [lm/W]:	101	**Net weight [kg]:**	1.700
Energy efficiency class:	E	**Warranty [years]:**	5
Electrical protection class:	I	**CE certificate:**	403/2023
Colour temperature [K]:	4000	**Index:**	225253
Color rendering index (Ra) >:	80	**EAN:**	5905963225253
SDCM:	3	**Category type:**	bulkheads
LED lifespan L70B50 [h]:	50000	**ETIM class:**	EC002892
Beam angle [°]:	120	**Category of application:**	parkings and bicycle paths
Diffuser material:	glass	**Photobiological safety:**	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser type:	OPAL		
Material of the body:	PP	**Manual:**	Download PDF
Colour of the body:	white	**Plik LDT:**	Download

LIGHT CURVES

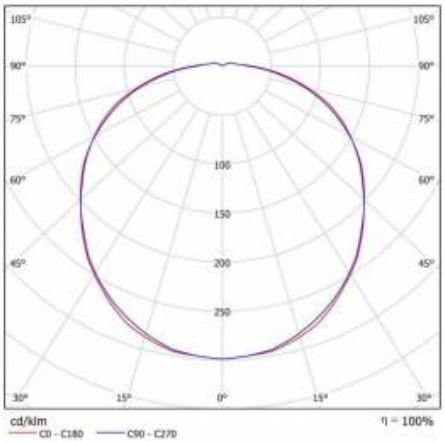

Card creation date: 10 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 403/2023

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl