

POINT LED RCR 8W SZKŁO PRM 3000K

DETAILED CARD



TECHNICAL PARAMETERS

| | |
|---------------------------------|--------|
| Index: | 225222 |
| Ingress protection: | IP44 |
| Impact resistance: | IK07 |
| Nominal power [W]: | 8 |
| Luminous flux [lm]*: | 850 |
| Colour temperature [K]: | 3000 |
| SDCM: | ≤ 3 |
| Energy efficiency class: | E |
| Material of the body: | PP |
| Diffuser material: | glass |

CHARACTERISTICS

Surface mounted, round LED light fixture with a high luminous flux, ingress protection class IP44 and an integrated energy-saving light source LED GO!. White base made of polypropylene; opal or prismatic glass diffuser. Available with a radio motion sensor (RCR). Color temperature 3000K/4000K, CRI>80, lifespan of LED 50 000h (L70B50) ta= 25 °C.

APPLICATION

surface mounted luminaire for mounting on ceilings and walls; intended both for indoor (maintenance rooms, passageways) and outdoor use (façade lighting). The version with a radio motion sensor (RCR) is particularly well-suited to be used as a light source for public rooms and buildings (civic buildings, apartment buildings).


POINT LED RCR 8W SZKŁO PRM 3000K

DETAILED CARD

TECHNICAL PARAMETERS TABLE

| | | | |
|--|------------|-----------------------------------|---|
| Nominal power [W]: | 8 | Colour of the body: | white |
| Light source: | LED module | Dimensions (H/W/T/S) [mm]: | ø230/90 |
| Colour temperature [K]: | 3000 | Impact resistance: | IK07 |
| Luminous flux [lm]: | 850 | Ingress protection: | IP44 |
| Rated power of the luminaire [W]: | 8 | Mounting version: | surface |
| Supply voltage [V]: | 220-240 | Working temperature [°C]: | from -20 to +35 |
| Diffuser type: | PRM | Net weight [kg]: | 1.700 |
| Frequency [Hz]: | 50 - 60 | Warranty [years]: | 5 |
| Motion sensor: | yes | Index: | 225222 |
| Energy efficiency class: | E | CE certificate: | 403/2023 |
| Luminous efficacy [lm/W]: | 106 | EAN: | 5905963225222 |
| Electrical protection class: | I | Category type: | bulkheads |
| Colour rendering index: | >80 | ETIM class: | EC002892 |
| SDCM: | ≤ 3 | Category of application: | parkings and bicycle paths |
| LED lifespan L70B50 [h]: | 50000 | Photobiological safety: | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Beam angle [°]: | 120 | Manual: | Download PDF |
| Diffuser material: | glass | Plik LDT: | Download |
| Material of the body: | PP | | |

LIGHT CURVES

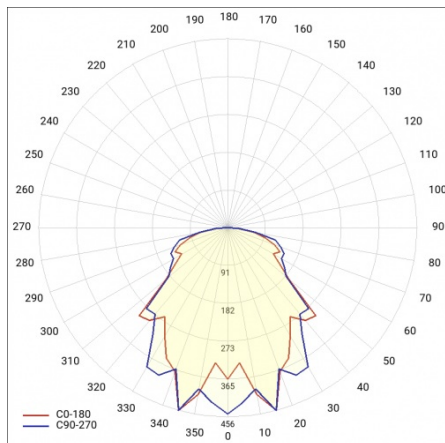

Card creation date: 10 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 403/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl