

# ELEGANTE LED 1136MM 2400LM OPAL IP44 830 (30W)

DETAILED CARD



## TECHNICAL PARAMETERS

Ingress protection:	IP44/20
Impact resistance:	IK02
Nominal power [W]:	30
Luminous flux [lm]*:	2400
Colour temperature [K]:	3000
SDCM:	≤ 3
Energy efficiency class:	G
Material of the body:	aluminium
Colour of the body:	silver
Diffuser material:	PC

## CHARACTERISTICS

ELEGANTE LED SYSTEM is a modern office fixture designed for flush mounting. It provides a combination of high light parameters and a modern decorative effect. The optical design has been designed using an iridescent diaphragm with high permeability and uniform light distribution.

## APPLICATION

The luminaire is dedicated for internal use. For use in office and commercial facilities, in particular in representative rooms.


# ELEGANTE LED 1136MM 2400LM OPAL IP44 830 (30W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

Light source:	LED module	Mounting dimensions [mm]:	1139/54
Nominal power [W]:	30	Impact resistance:	IK02
Rated power of the luminaire [W]:	33.50	Ingress protection:	IP44/20
Supply voltage [V]:	220-240	Mounting version:	recessed
Frequency [Hz]:	50 - 60	Working temperature [°C]:	from -17 to +35
Luminous flux [lm]:	2400	Accessories included:	diffuser
Luminous efficacy [lm/W]:	71	Net weight [kg]:	2.200
Energy efficiency class:	G	CE certificate:	<a href="#">243/2023</a>
Electrical protection class:	I	Index:	388583
Colour temperature [K]:	3000	EAN:	5905963388583
Colour rendering index:	>80	Category type:	systems
SDCM:	≤ 3	Version:	individual
LED lifespan L70B50 [h]:	115000	Product line:	INDIVIDUAL VARIANT 30W/15W
Diffuser material:	PC	Light distribution type:	open space
Diffuser type:	OPAL	Plik LDT:	<a href="#">Download</a>
Diffuser colour:	white		
Material of the body:	aluminium		
Colour of the body:	silver		
Dimensions (H/W/T/S) [mm]:	1136/52/66		

## LIGHT CURVES

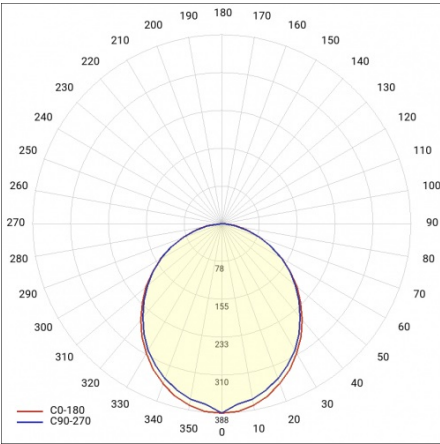


# ELEGANTE LED 1136MM 2400LM OPAL IP44 830 (30W)


DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
81000945	ELEGANTE LED SYSTEM - OPAL diffuser - 1 rm (max 25 rm)
388736	ELEGANTE SYSTEM LED end set
388743	ELEGANTE SYSTEM LED gniazdo 3 polowe
388750	ELEGANTE SYSTEM LED gniazdo 5 polowe
388767	ELEGANTE SYSTEM LED wtyk 3 polowy
388774	ELEGANTE SYSTEM LED wtyk 5 polowy
388729	ELEGANTE SYSTEM LED klosz PC opal co-extrusion+soft fixing part 25m



ELEGANTE SYSTEM LED gniazdo 3 polowe (388743)



ELEGANTE SYSTEM LED gniazdo 5 polowe (388750)



ELEGANTE SYSTEM LED wtyk 3 polowy (388767)



ELEGANTE SYSTEM LED wtyk 5 polowy (388774)



ELEGANTE SYSTEM LED klosz PC opal co-extrusion+soft fixing part 25m (388729)