

# SKVER S BASIC 3900LM 840 IP66 II CL ST (34W) (MARCH)

DETAILED CARD



## TECHNICAL PARAMETERS

<b>Index:</b>	824869
<b>Ingress protection:</b>	IP66
<b>Impact resistance:</b>	IK10
<b>Rated power of the luminaire [W]*:</b>	34
<b>Luminous flux [lm]*:</b>	3900
<b>Colour temperature [K]:</b>	4000
<b>Color rendering index (Ra) &gt;:</b>	80
<b>Electrical protection class:</b>	II
<b>Optics:</b>	no
<b>Control:</b>	ON/OFF

## CHARACTERISTICS

Skver LED S Basic is a new generation of LED park and street lighting fixtures. It uses directional multi-lens matrices made of PMMA, each lens having the same optics, ensuring consistent light characteristics over time. The design of the fixture ensures that the internal chamber remains sealed. Easy installation thanks to the power connection cable. The body and bracket are made of die-cast aluminium, powder-coated in black, and feature a very high IP66 rating and IK10 impact resistance. Standard equipment: protection against accidental overheating of the NTC luminaire. Certificates: CE, RoHS.

## APPLICATION

External areas of places such as: town halls, libraries, city offices, healthcare facilities, schools, preschools, public gardens, streets, sidewalks, recreational areas: sports fields, playgrounds, bike paths, historical sites, old towns.


# SKVER S BASIC 3900LM 840 IP66 II CL ST (34W) (MARCH)

## DETAILED CARD

### TECHNICAL PARAMETERS TABLE

Index:	824869	Colour of the body:	black
EAN:	5905963824869	Impact resistance:	IK10
Category type:	Park and city lighting	Ingress protection:	IP66
Version:	A	Mounting version:	Top, on pole
Light source:	LED module	Lateral surface (SCx) [m2]:	0.86
Rated power of the luminaire [W]:	34	Working temperature [°C]:	from -40 to +50
Supply voltage [V]:	222 - 240	Control:	ON/OFF
Frequency [Hz]:	50 - 60	Net weight [kg]:	5.560
Luminous flux [lm]:	3900	Wire type:	HO7 RNF-2x1
Luminous efficacy [lm/W]:	124	Warranty [years]:	5
Electrical protection class:	II	ENEC Certificate:	NIE
Colour temperature [K]:	4000	CE certificate:	<a href="#">70/2025</a>
Color rendering index (Ra) >:	80	Zhaga-D4i:	NIE
SDCM:	5	Environmental Product Declaration (EPD):	<a href="#">683/2024</a>
Diffuser material:	PC	Manual:	<a href="#">Download PDF</a>
Diffuser type:	transparent	Category of application:	parkings and bicycle paths
Optics:	no	Product line:	BASIC
Material of the body:	powder coated aluminium		

### LIGHT CURVES

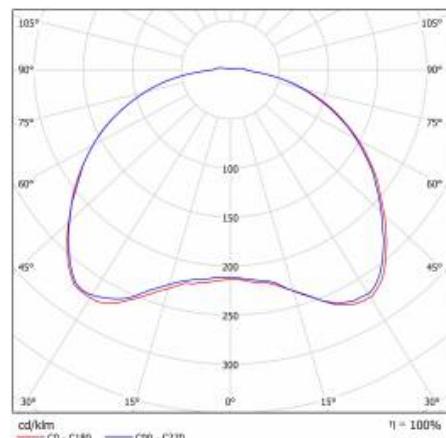

# SKVER S BASIC 3900LM 840 IP66 II CL ST (34W) (MARCH)

## DETAILED CARD

### ACCESSORIES AVAILABLE

index	Name
435515	SKVER Backshield RAL9005
435522	SKVER Hood example 1 RAL9005
421518	SKVER Hood ULR example 2 RAL9005
435461	SKVER cover fi 48mm
435478	SKVER cover fi 60mm
584534	Key for opening Tiara XS / Skver



SKVER Backshield RAL9005 (435515)



SKVER Hood example 1 RAL9005 (435522)



SKVER Hood ULR example 2 RAL9005 (421518)



Key for opening Tiara XS / Skver (584534)

Card creation date: 07 February 2026

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 70/2025