LUNGO II TRACK 1350LM 40° II CL. IP20 GREY 927 DALI (12W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	742699
Rated power of the luminaire [W]*:	12
Luminous flux [lm]*:	1350
Colour temperature [K]:	2700
Color rendering index (Ra) >:	90
Beam angle [°]:	40
Material of the body:	aluminium
Colour of the body:	grey
Ring colour:	grey
Dimensions (H/W/T/S) [mm]:	fi=60 L=170

CHARACTERISTICS

The Lungo II LED Track luminaire is equipped with an integrated, durable and energy-efficient LED module that provides a luminous flux of up to 1330 lm, depending on the selected version. The user can choose one of three colour temperatures: 2700 K, 3000 K or 4000 K, as well as two colour rendering index variants – Ra 80 or Ra 90, which allows the light quality to be adjusted to the nature of the space. The luminaire offers three light distribution angles: 20°, 40° and 70°, making it suitable for both accent and general lighting. The body is made of a powder-coated aluminium housing, available in white, black, grey or black with a gold interior. The IP20 protection rating allows the luminaire to be used indoors, while the track version is fully compatible with 3-phase busbar systems, ensuring flexibility in installation and lighting configuration.

APPLICATION

Luminaire is used in spaces such as:
- corridors and passageways in office and institutional buildings
- entrance areas and lobbies
- staircases
- reception areas

LUNGO II TRACK 1350LM 40° II CL. IP20 GREY 927 DALI (12W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE


Index:	742699
EAN:	5905963742699
Category type:	decorative fixtures
Category of application:	architectural, office lighting, commercial facilities
Light source:	COB
Rated power of the luminaire [W]:	12
Luminous flux [lm]:	1350
Supply voltage [V]:	220-240
Frequency [Hz]:	0/50/60
Luminous efficacy [lm/W]:	113
Energy efficiency class:	E
Electrical protection class:	II
Colour temperature [K]:	2700
Color rendering index (Ra) >:	90
LED lifespan L90B10 [h]:	50000
Working temperature [°C]:	from 0 to +35
Beam angle [°]:	40
Exchangeable source:	yes
Optics:	reflector
Optics material:	aluminium

Material of the body:	aluminium
Colour of the body:	grey
Ring material:	aluminium
Ring colour:	grey
Dimensions (H/W/T/S) [mm]:	fi=60 L=170
Mounting dimensions [mm]:	L= 40mm fi6mm
Ingress protection:	IP20
Mounting version:	track
DIMM DALI:	yes
Dimensions of single box [mm]:	260/130/65
Number on the palette [pcs]:	480
Net weight [kg]:	0.515
Gross weight [kg]:	0.585
Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Warranty [years]:	5
CE certificate:	01/2026
Manual:	Download PDF
ISO Certificates:	9001:2015, 14001:2015, 45001:2018, 50001:2018
Plik LDT:	Download

LUNGO II TRACK 1350LM 40° II CL. IP20 GREY 927 DALI (12W)

DETAILED CARD

TECHNICAL PICTURES

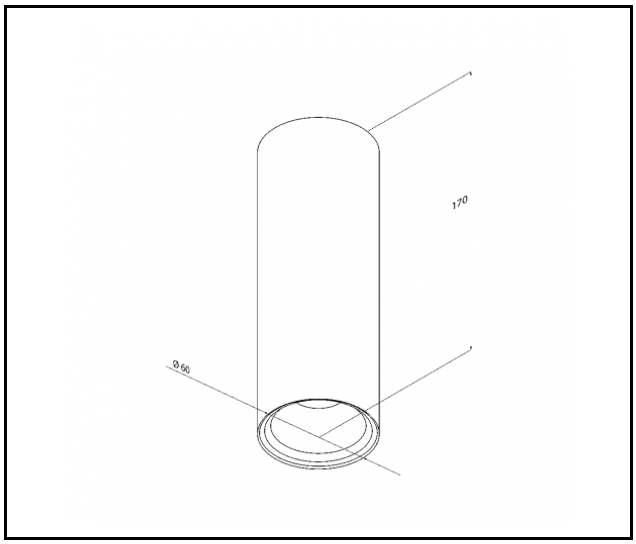

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

This product is a subject to electric andelectronic waste equipment regulations (WEEE).

Certificate CE - Nr: 01/2026

LENA LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl